
## ARCTIC PORCELAIN

This frost, stain and wear-resistant through-bodied porcelain is meticulously rectified for precise installation.





## **ARCTIC PORCELAIN**

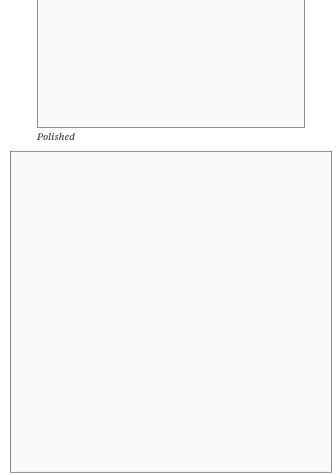

Polished

				1011011011					
			APPLIC	ATIONS		VARIATION	TAILORED TO CUSTOMIZATION <sup>2</sup>		
									CARPET CUTTING
Medium Traffic Commercial 1	INTERIOR WALL	SHOWER WALL Yes, including steam	SHOWER FLOOR	EXTERIOR FLOOR No	Yes, including freeze thaw	POOL/ FOUNTAIN	TAIN TOP	V1 V2 V3 V4	FIELD
									FINISH
									MOSAIC
									SADDLE
									VANITY TOP
									WATERJET

INSTALLATION/MAINTENANCE											
SETTING MATERIAL	GROUT	GROUT JOINT	MEMBRANE	CAULK	SEALER	CLEANER	INSTALLATION INSTRUCTIONS	LAYOUT	DRY LAYOUT		
Ardex X77 White <sup>3</sup>	Ardex FL Rapid Set Sanded <sup>4</sup>	½" minimum	Mapei Mapelastic AquaDefense	Mapei Keracaulk Unsanded	AquaMix Grout Release	AquaMix Concentrated Stone & Tile Cleaner	TCNA Handbook	Max. 33% offset	Optional		

## NOTES

- <sup>1</sup> Dry areas only
- $^{2}$  Tailored To Customization: 6"  $\times$  6" smallest size.
- $^{\rm 3}$  Alternate mortar Mapei Ultraflex LFT White
- <sup>4</sup> Alternate grout Mapei Ultracolor Plus Sanded

Material: Double pressed porcelain glazed, polished and rectified (top layer is white porcelain, bottom layer is beige) Per TCNA Guidelines, running bond/brick joint patterns to be set with a max. offset of 33% and min. grout joint of  $\frac{1}{8}$ ", unless otherwise approved by owner.

10% Recycled Content

