
OXO VERDIGRIS

Oxo Verdigris is a stunning recreation of atmospheric copper oxidation in a timeless Green Patina color with a matte finish. Stocked in 24" x 24" porcelain field tiles.






OXO VERDIGRIS

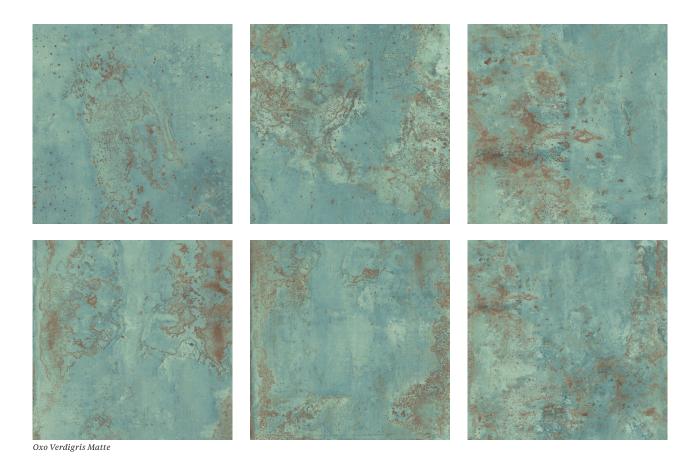

APPLICATIONS								ATTRIBUTES	
INTERIOR FLOOR	INTERIOR WALL	SHOWER WALL	SHOWER FLOOR	EXTERIOR FLOOR	EXTERIOR WALL	POOL/ FOUNTAIN	COUNTER TOP	DCOF ²	
Medium Traffic Commercial	All	Yes, including steam	Yes	No	Yes, including freeze thaw	Yes	No	0.74 0.76 0.76	



TAILORED TO CUSTOMIZATION
CARPET CUTTING
FIELD
FINISH
MOSAIC
SADDLE
VANITYTOP
WATERJET

INSTALLATION/MAINTENANCE										
SETTING MATERIAL	GROUT	GROUT JOINT	MEMBRANE	CAULK	SEALER	CLEANER	INSTALLATION INSTRUCTIONS	LAYOUT	DRY LAYOUT	
Ardex X7 Microtec Fiber Reinforced Mortar ²	Ardex FL Rapid Set Sanded ³	½" minimum	Ardex 8+9	Ardex SX	AquaMix Grout Release	AquaMix Concentrated Stone & Tile Cleaner	TCNA Handbook	33% max. offset	Partial ⁴	

NOTES

- 1 The standard requires a minimum wet DCOF Acutest value greater than 0.42 for ceramic tiles (inclusive of porcelain) for level interior spaces expected to be walked upon when wet.
- ² Alternate mortar Ardex X5 Medium Bed Mortar or Mapei Ultraflex LFT
- 3 Alternate grout Mapei Flexcolor CQ or Mapei Ultracolor Plus FA
- $^4\mbox{Layout}$ for color and vein selection before installation.

30 faces

Tech Note: Porcelains that meet the DCOF standard may have a more abrasive surface that might show dirt or debris. Remove with soap, water and firm scrubbing in order to clean. Consider this in the selection process.

