





## QUICK REFERENCE GUIDE V105

### COLLECTIONS

<b>NERI</b> Solid Glaze	04
STUDIO Translucent Glaze	22
RIVIERA Multi Tone Glaze	30
HABITAT Glossy & Matte Glaze	40
EARTH Matte Crackle	50
OCEAN Micro Crackle	54
HAMPTON Classic Crackle	58
DIAMONDS Dimensional Field	64
MOSAIC FLOOR	66
Glazed Porcelain Tiles (39% Recycled)	70
Glass Floor Tiles (98% Recycled)	74
CUSTOM SHOP	76
INSTALLATION & MAINTENANCE	78
TECHNICAL GUIDE	81

Find out the product code simply by putting together the color and the item **ADNZ** 



WHITE







**WHITE** 












**ADNZ 848** 4"x8"



**ADNZ 882** 2"x8"

### **TRIMS**

FINISHING EDGES



**ADNZ 506** FE 0.4"x6" **ADNZ 508** FE 0.4"x8" ADNZ 500 FE Corner

**GLAZED EDGES** 




**ADNZ 813** 3"x12" DGE Right **ADNZ 814** 3"x12" DGE Left ADNZ 815 6"x12" DGE Right **ADNZ 816** 6"x12" DGE Left

### **BULLNOSES**

**ADNZ 831** 3"x12"

**ADNZ 861** 6"x12"

**ADNZ 841** 4"x12"



ADNZ 840

6" Arabesque Flat

**ADNZ 805** 3"x6" SBN 6" **ADNZ 806** 3"x6" SBN 3" ADNZ 807 3"x6" DBN Right **ADNZ 808** 3"x6" DBN Left **ADNZ 803** 6"x6" SBN **ADNZ 804** 6"x6" DBN **ADNZ 810** 4"x8" SBN 4" **ADNZ 811** 4"x8" SBN 8" **ADNZ 812** 4"x4" DBN **ADNZ 800** 2"x2" DBN

**ADNZ 826** 2"x6" SBN 6"

**ADNZ 828** 2"x8" SBN 8"

#### BEVELED





**ADNZ 933** 3"x3" (Only comes with Double Glazed Edge)






ADNZ 944 4"x4" (Only comes with Double Glazed Edge)


#### **TRIMS**

BEVELED GLAZED EDGES




ADNZ 907 3"x6" Beveled SGE 3" ADNZ 908 3"x6" Beveled SGE 6" ADNZ 933 3"x3" Beveled DGE **ADNZ 911** 4"x8" Beveled SGE 4" **ADNZ 910** 4"x8" Beveled SGE 8" ADNZ 944 4"x4" Beveled DGE


### **DECORATIVE ACCESSORIES**

















ADNZ 702 6"x6" Madeira Deco White






ADNZ 502 6"x6" Botanical Deco

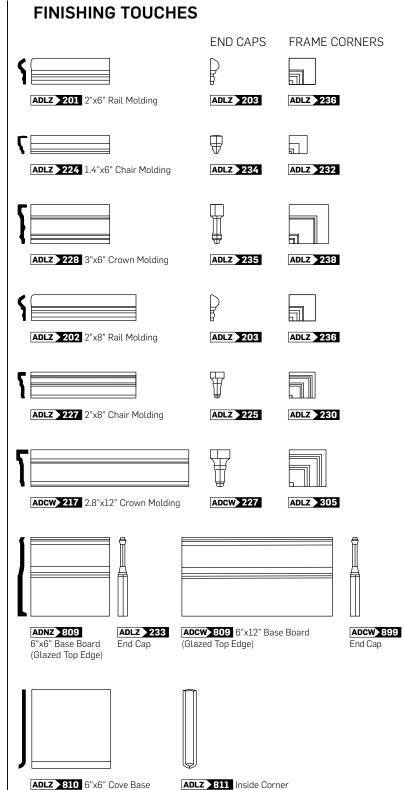





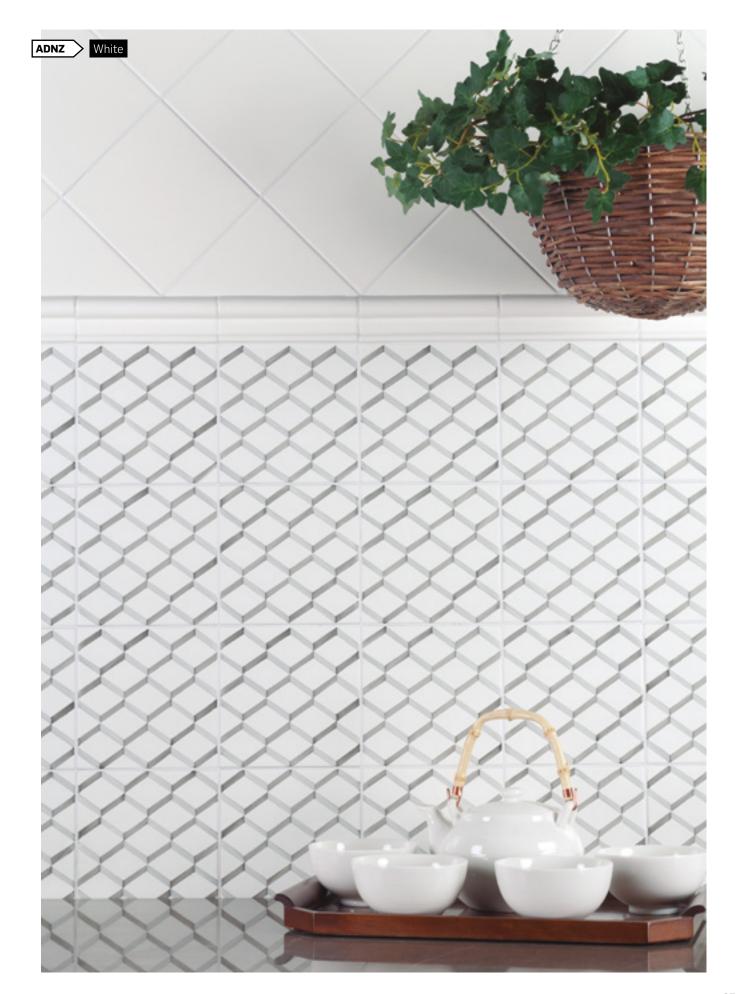

Find out the product code simply by putting together the color and the item

Example: ADNB 836

**NERI** Solid Glaze **Glossy Finish** 



**BONE** 

FLAT














**ADNB 848** 4"x8"



**ADNB 882** 2"x8"

### **TRIMS**

FINISHING EDGES



**ADNB 506** FE 0.4"x6" **ADNB 508** FE 0.4"x8" **ADNB 500** FE Corner

GLAZED EDGES




ADNB 813 3"x12" DGE Right
ADNB 814 3"x12" DGE Left
ADNB 815 6"x12" DGE Right
ADNB 816 6"x12" DGE Left

### BULLNOSES

**ADNB 831** 3"x12"

**ADNB 861** 6"x12"

**ADNB 841** 4"x12"



ADNB 840

6" Arabesque Flat

ADNB 805 3"x6" SBN 6"

ADNB 806 3"x6" SBN 3"

ADNB 807 3"x6" DBN Right

ADNB 808 3"x6" DBN Left

ADNB 803 6"x6" SBN

ADNB 804 6"x6" DBN

ADNB 810 4"x8" SBN 4"

ADNB 811 4"x8" SBN 8"


ADNB 812 4"x4" DBN

ADNB 800 2"x2" DBN

**ADNB 826** 2"x6" SBN 6"

ADNB 828 2"x8" SBN 8"

### BEVELED





(Only comes with Double Glazed Edge)




ADNB 944 4"x4"

(Only comes with Double Glazed Edge)

#### **TRIMS**


BEVELED GLAZED EDGES



ADNB 907 3"x6" Beveled SGE 3"
ADNB 908 3"x6" Beveled SGE 6"
ADNB 933 3"x3" Beveled DGE
ADNB 911 4"x8" Beveled SGE 4"
ADNB 910 4"x8" Beveled SGE 8"
ADNB 944 4"x4" Beveled DGE


### **DECORATIVE ACCESSORIES**

**BONE** 






**ADCB 200** 0.8"x12" Corner Trim



ADNB 701 6"x6" Kubic Deco Bone




ADLB 223





ADNB 502 6"x6" Botanical Deco

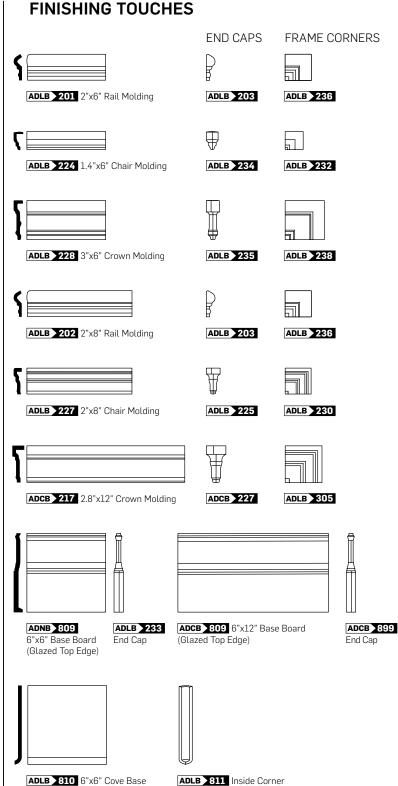







### **NER** Solid Glaze **Glossy Finish**

**SIERRA SAND** 







### **FIELD TILES**







**ADNS 836** 3"x6"





**ADNS 848** 4"x8"

ADNS 840 6" Arabesque Flat

### **TRIMS**

FINISHING EDGES



**ADNS 506** FE 0.4"x6" **ADNS 508** FE 0.4"x8" ADNS 500 FE Corner

BULLNOSES



**ADNS 805** 3"x6" SBN 6" **ADNS 806** 3"x6" SBN 3" ADNS 807 3"x6" DBN Right **ADNS 808** 3"x6" DBN Left **ADNS 810** 4"x8" SBN 4" ADNS 811 4"x8" SBN 8" **ADNS 812** 4"x4" DBN **ADNS 800** 2"x2" DBN **ADNS 826** 2"x6" SBN 6"


**ADNS 828** 2"x8" SBN 8"

#### **BEVELED**





**ADNS 936** 3"x6" Beveled **ADNS** 933 3"x3" (Only comes with Double Glazed Edge)






**ADNS** 948 4"x8" Beveled

#### ADNS 944 4"x4" (Only comes with Double Glazed Edge)


### **TRIMS**

BEVELED GLAZED EDGES



**ADNS 907** 3"x6" Beveled SGE 3" **ADNS 908** 3"x6" Beveled SGE 6" ADNS 933 3"x3" Beveled DGE ADNS 911 4"x8" Beveled SGE 4" ADNS 910 4"x8" Beveled SGE 8" ADNS 944 4"x4" Beveled DGE

### **DECORATIVE ACCESSORIES**








ADLS 226 0.7"x6" Stripe Liner











ADNB 701 6"x6" Kubic Deco Bone






ADNZ 702






ADNB 702 6"x6" Madeira Deco Bone



6"x6" Madeira Deco White



### **FINISHING TOUCHES**



END













ADLS 232







ADLS 238

13



ADLS 202 2"x8" Rail Molding

ADLS 227 2"x8" Chair Molding

ADNS 809 6"x6" Base Board

(Glazed Top Edge)

















ADLS 233







### **NER** Solid Glaze **Glossy Finish**

**SILVER MIST** 








### **FIELD TILES**







**ADNM 836** 3"x6"





**ADNM 848** 4"x8"

ADNM 840 6" Arabesque Flat

### **TRIMS**

FINISHING EDGES



**ADNM 506** FE 0.4"x6" **ADNM 508** FE 0.4"x8" ADNM 500 FE Corner

#### BULLNOSES



**ADNM 805** 3"x6" SBN 6"

**ADNM 806** 3"x6" SBN 3" ADNM 807 3"x6" DBN Right **ADNM 808** 3"x6" DBN Left **ADNM 810** 4"x8" SBN 4" **ADNM 811** 4"x8" SBN 8"


**ADNM 812** 4"x4" DBN **ADNM 800** 2"x2" DBN **ADNM 826** 2"x6" SBN 6" **ADNM 828** 2"x8" SBN 8"

#### **BEVELED**





**ADNM 936** 3"x6" Beveled **ADNM 933** 3"x3" (Only comes with Double Glazed Edge)






**ADNM** 948 4"x8" Beveled

ADNM 944 4"x4" (Only comes with Double Glazed Edge)

### **TRIMS**

BEVELED GLAZED EDGES



**ADNM 907** 3"x6" Beveled SGE 3" ADNM 908 3"x6" Beveled SGE 6" ADNM 933 3"x3" Beveled DGE ADNM 911 4"x8" Beveled SGE 4" ADNM 910 4"x8" Beveled SGE 8"


ADNM 944 4"x4" Beveled DGE

### **DECORATIVE ACCESSORIES**



















ADNB 701 6"x6" Kubic Deco Bone





ADNZ 702

6"x6" Madeira Deco White











**ADNM 502** 6"x6" Botanical Deco

**FINISHING TOUCHES** 



END















ADLM 232






ADLM 235



ADLM 238



ADLM 202 2"x8" Rail Molding

ADLM 227 2"x8" Chair Molding

ADNM 809 6"x6" Base Board

(Glazed Top Edge)














17






ADLM 233

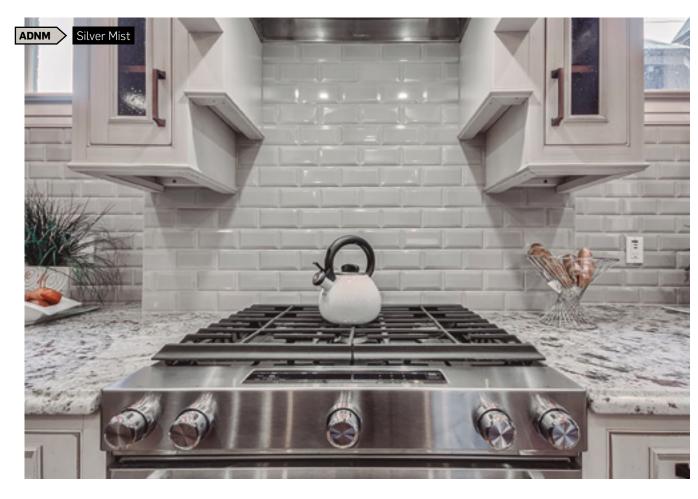



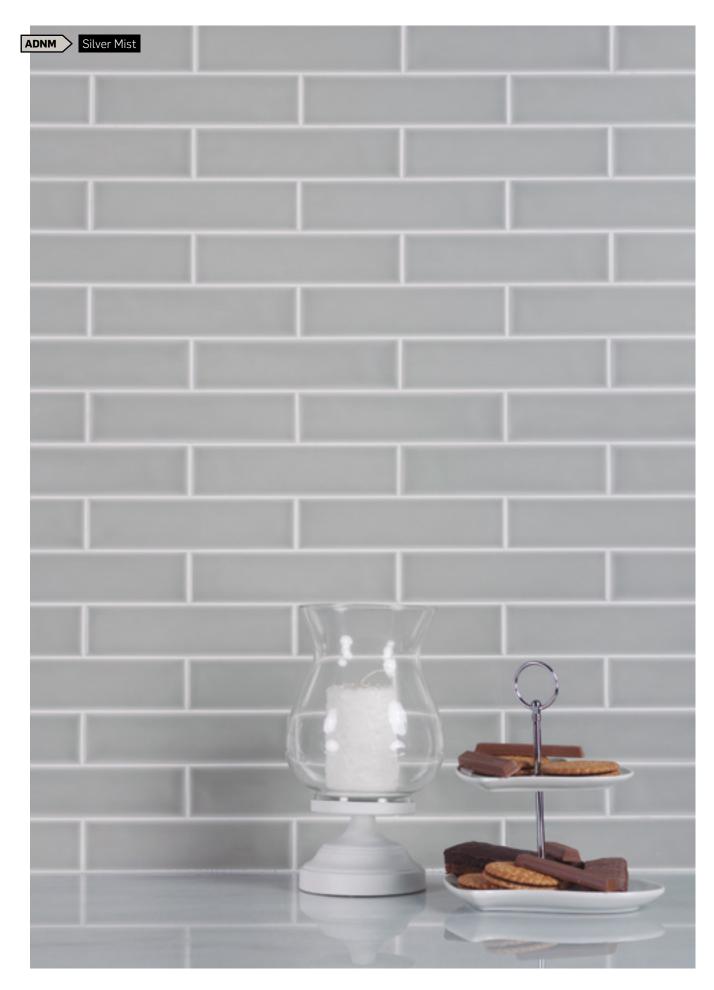

### **NER** Solid Glaze **Glossy Finish**

putting together the color and the item ADNK

Find out the product code simply by



### **FIELD TILES**





**ADNK 836** 3"x6"

#### **TRIMS**

FINISHING EDGES



**ADNK 506** FE 0.4"x6" ADNK 500 FE Corner

#### BULLNOSES



**ADNK 805** 3"x6" SBN 6"

**ADNK 806** 3"x6" SBN 3"

ADNK 807 3"x6" DBN Right

ADNK 808 3"x6" DBN Left

#### BEVELED







### **TRIMS**


BEVELED GLAZED EDGES





ADNK 907 3"x6" Beveled SGE 3" ADNK 908 3"x6" Beveled SGE 6"

ADNK 933 3"x3" Beveled DGE

### **DECORATIVE ACCESSORIES**

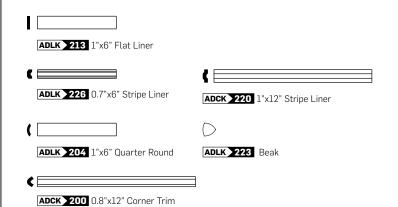

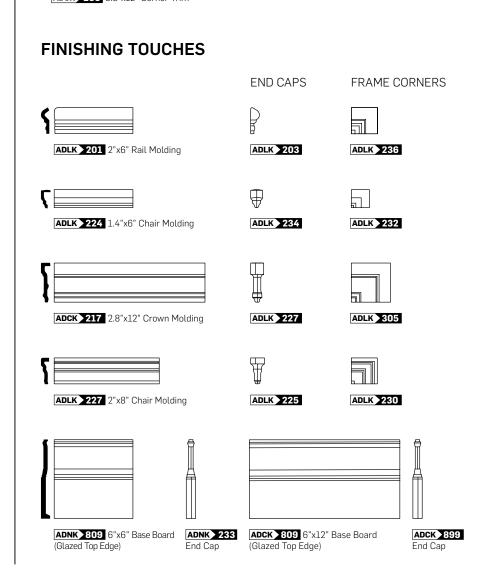

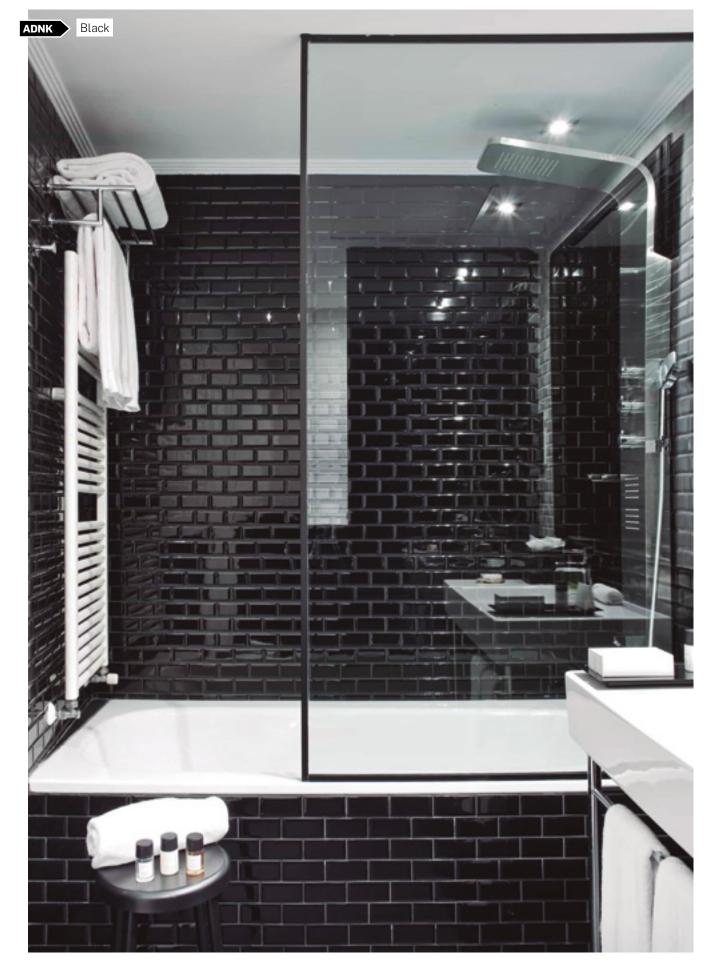

### **STUDIO** Translucent Glaze **Glossy Finish - Slightly Undulated Surface**

Find out the product code simply by putting together the color and the item ADSTW 836

### **AVAILABLE COLORS**

Snow Cap **ADSTW** Bamboo ADSTB Ice Blue ADSTI Fern **ADSTF** Almond **ADSTA** Eucalyptus **ADSTE** Silver Sands ADSTS Graystone **ADSTG** Timberline ADSTT Volcanico ADSTV

### **STUDIO** Translucent Glaze **Glossy Finish - Slightly Undulated Surface**



#### **AVAILABLE COLORS**


Snow Cap **ADSTW** Bamboo ADSTB Ice Blue ADSTI Fern **ADSTF** Almond ADSTA Eucalyptus **ADSTE** Silver Sands ADSTS Graystone **ADSTG** Timberline **ADSTT** Volcanico ADSTV

### **FIELD TILES**

UNDULATED



**836** 2.8"x5.8"



**866** 5.8"x5.8"

### **TRIMS**

FINISHING EDGES



FE Corner

**506** FE 0.5"x5.8" **508** FE 0.5"x7.8" **500** FE Corner

#### **GLAZED EDGES**



 2.8"x5.8" SGE 5.8" 2.8"x5.8" SGE 2.8" 2.8"x5.8" DGE Right 2.8"x5.8" DGE Left 5.8"x5.8" SGE 5.8"x5.8" DGE 3.8"x7.8" SGE 3.8"

 3.8"x7.8" SGE 7.8" 3.8"x7.8" DGE Left 3.8"x7.8" DGE Right 1.9"x7.8" SGE 7.8" 1.9"x7.8" SGE 1.9"

**816** 1.9"x7.8" DGE Right **817** 1.9"x7.8" DGE Left

FRAMED



**936** 2.8"x5.8"



**933** 2.8"x2.8"

(Only comes with Double Glazed Edge)



BEVELED

942 6" Half Arabesque (Comes with a Glazed Edge)


940 6" Arabesque Beveled



943 6" Tear Drop Beveled

#### **TRIMS**

FRAMED GLAZED EDGES



907 2.8"x5.8" Framed SGE 2.8" 908 2.8"x5.8" Framed SGE 5.8"

933 2.8"x2.8" Framed DGE

### TRIMS

BEVELED GLAZED EDGES



942 Half Arabesque SGE

### **DECORATIVE ACCESSORIES**

HAND PAINTED

**ADSTH 136** 2.8"x5.8" Flower

**ADSTH 166** 5.8"x5.8" Flower

**ADSTH 236** 2.8"x5.8" Flower

**ADSTH 266** 5.8"x5.8" Flower

Deco Dusk (Bamboo Background)

Border Dusk (Bamboo Background)

Deco Dawn (Bamboo Background)

Border Dawn (Bamboo Background)




**504** 5.8"x5.8" Universe Deco



**505** 5.8"x5.8" Planet Deco




301 5.8"x5.8" Vizcaya Deco



103 2.8"x7.8" Palm Beach Border





102 3.8"x7.8" Gables Border

### 

104 1"x7.8" Ponciana Liner



203 1.2"x7.8" Round Bar Liner







205 1"x5.8" Quarter Round 206 Beak

207 0.7"x7.8" Stripe Liner

### **FINISHING TOUCHES**

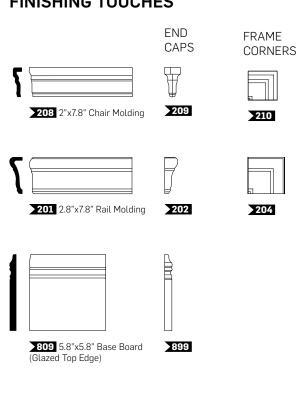


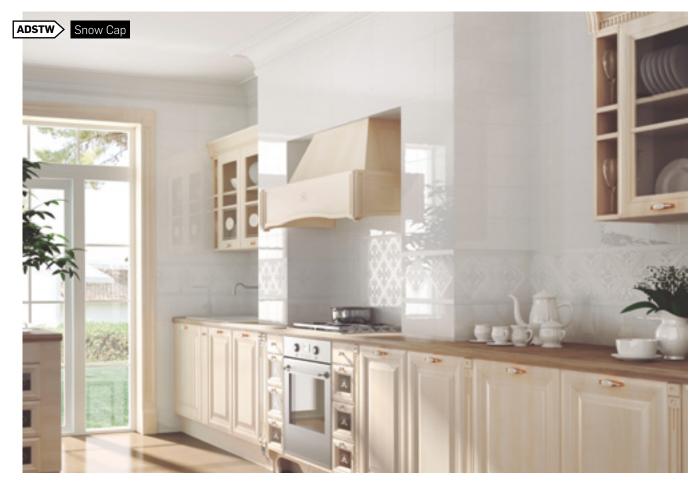










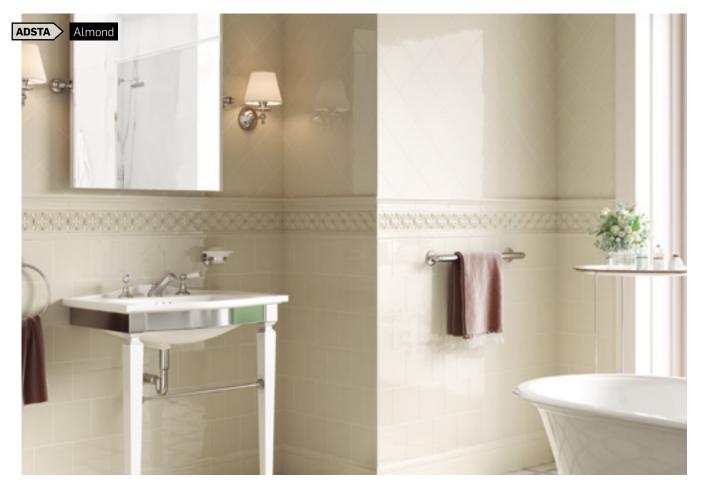


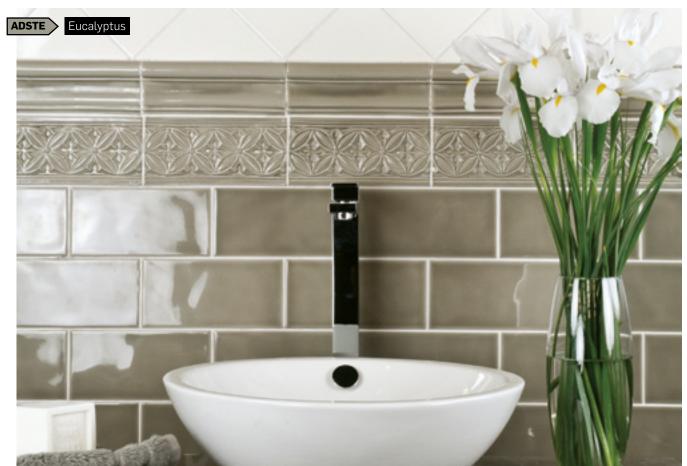

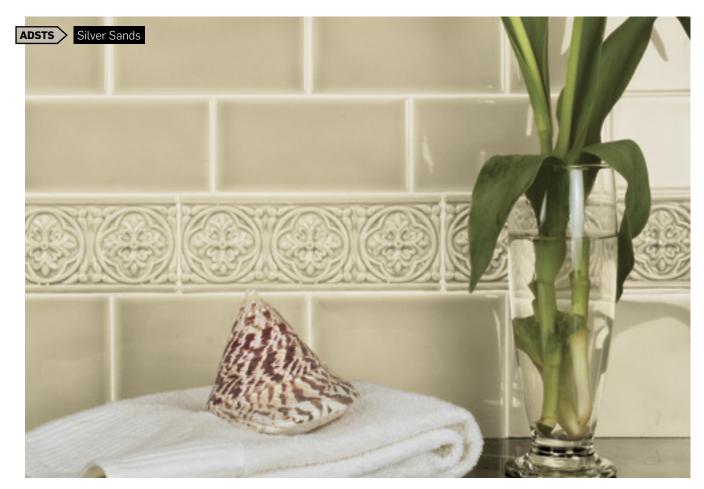

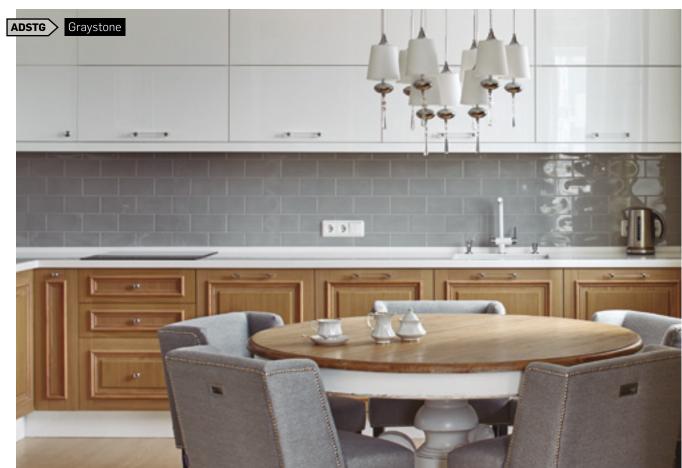



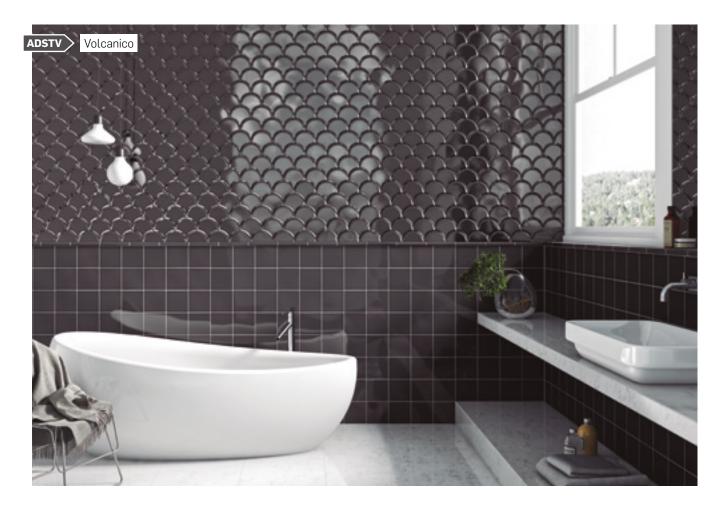




# **RIVIERA** Multi Tone Glaze Glossy Finish




#### **AVAILABLE COLORS**



### FIELD TILES






#### **888** 8"x8"

### **TRIMS**







### **DECORATIVE ACCESSORIES**





### **FINISHING TOUCHES**

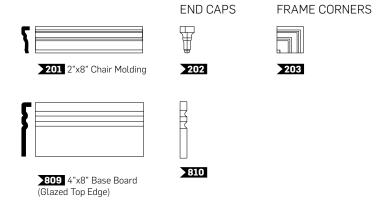





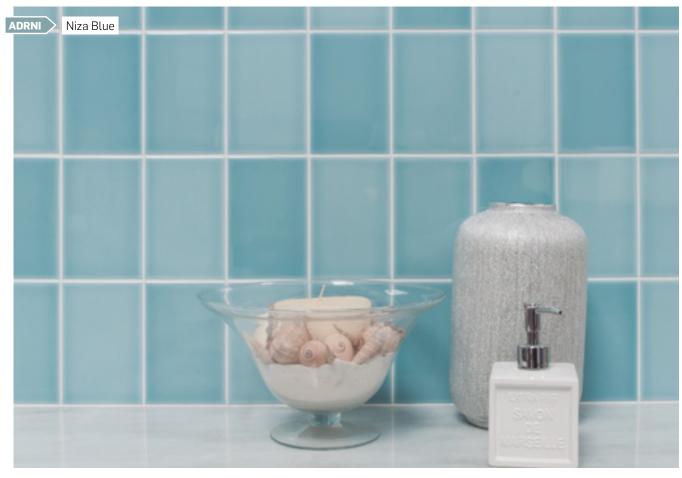


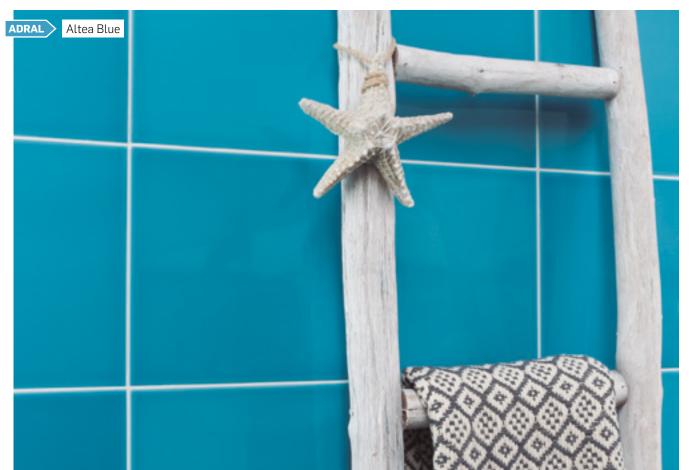

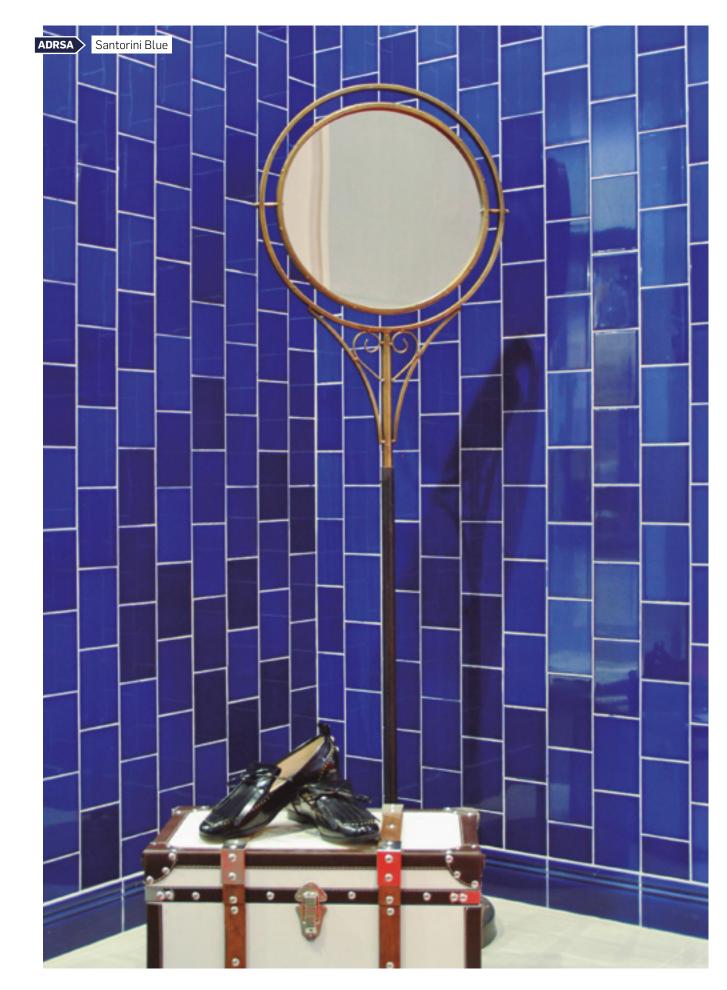


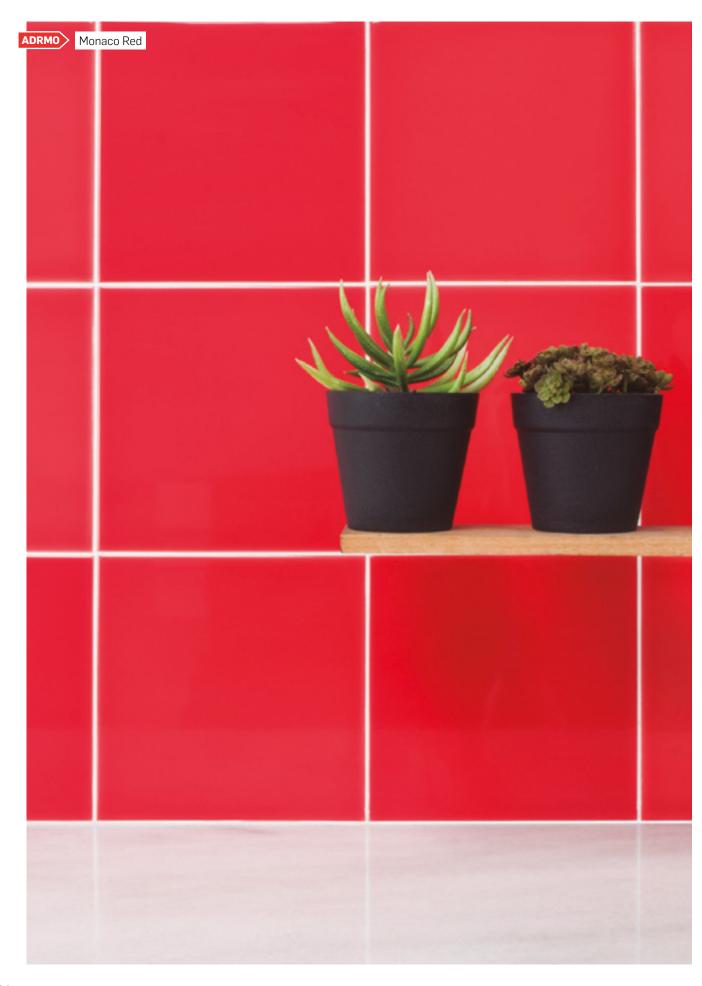

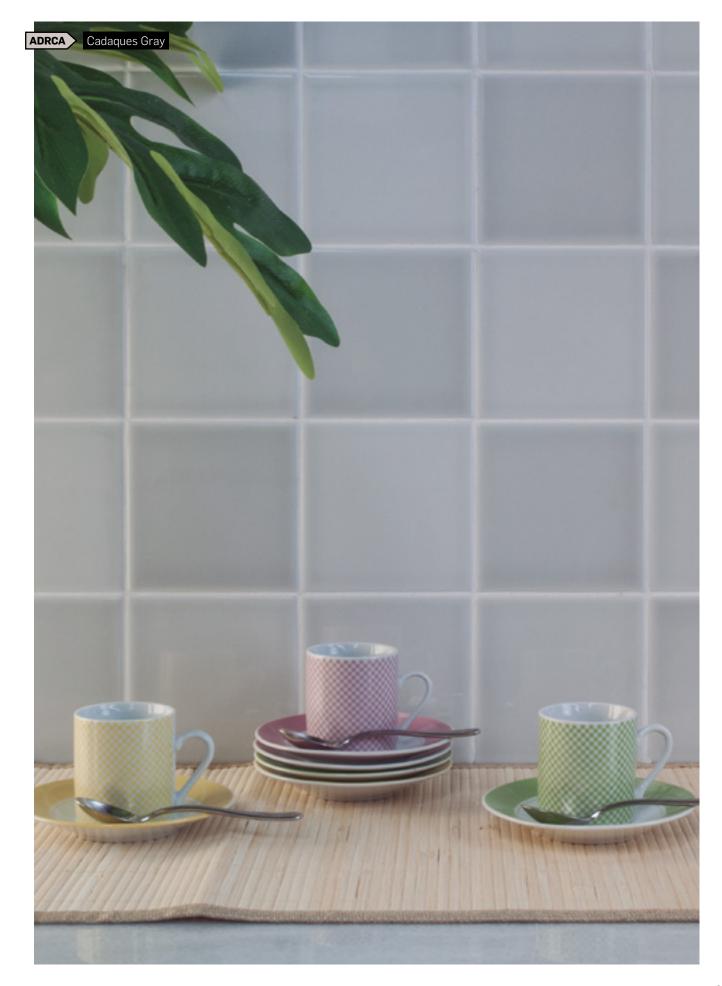

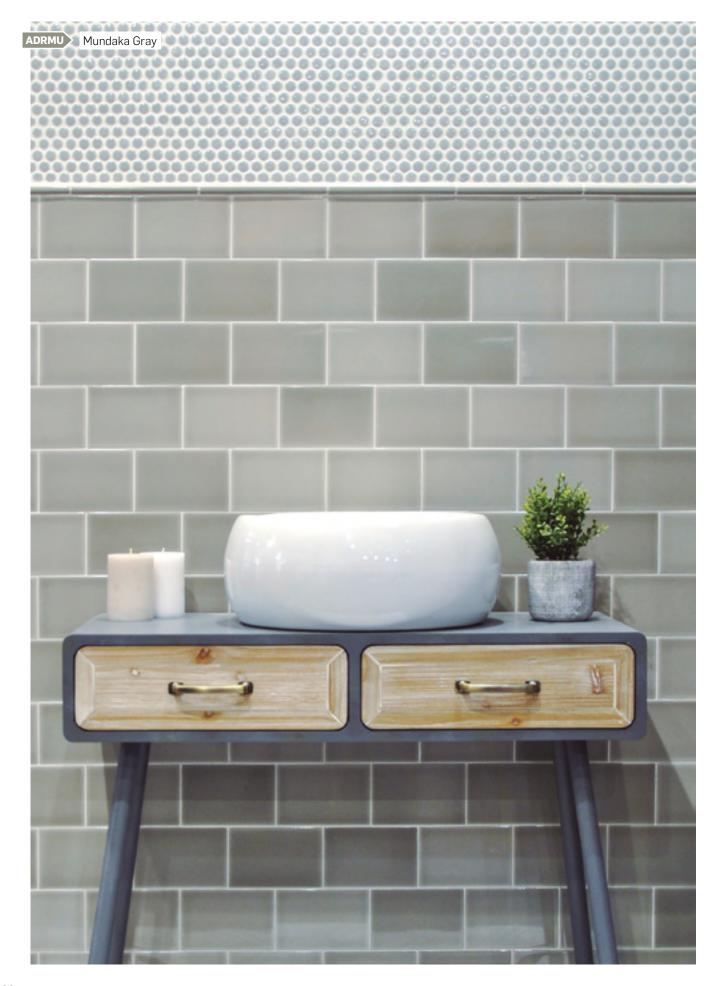



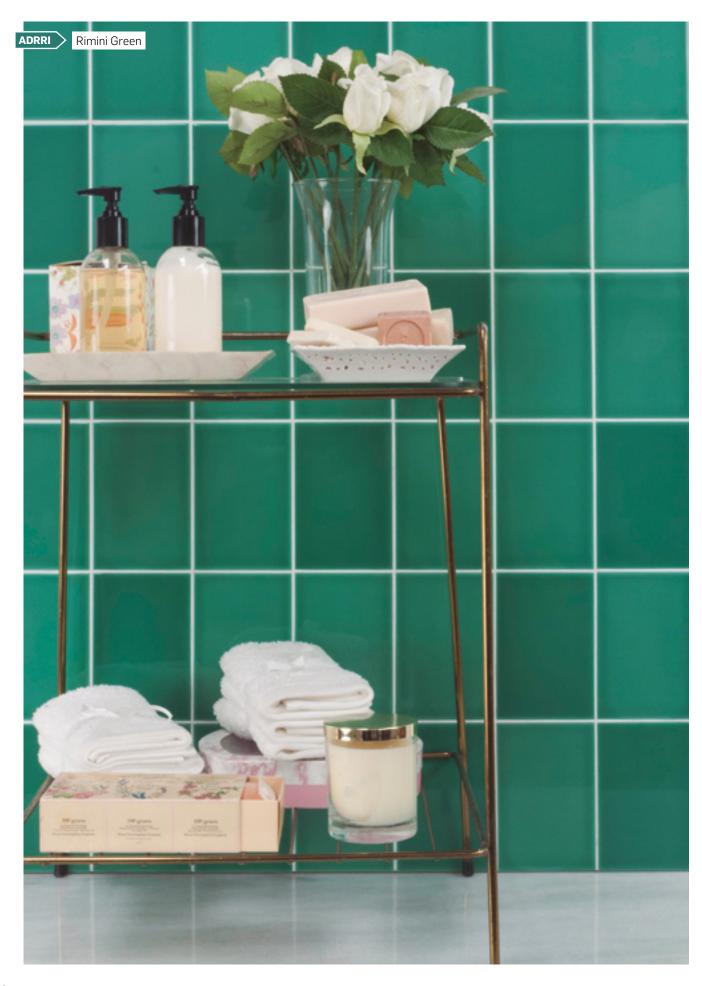



### **HABITAT** Multi Tone Glaze **Glossy Finish - Undulated Surface**

Find out the product code simply by putting together the color and the item ADHGC 825

**AVAILABLE COLORS** 

Cloud ADHGC

Alabaster ADHGA

River Blue ADHGR

Leaf ADHGL

Pewter ADHGP

### Graphite ADHGG

### **HABITAT** Multi Tone Glaze **Matte Finish - Undulated Surface**

Find out the product code simply by putting together the color and the item ADHMC 825

**AVAILABLE COLORS** 

Alabaster ADHMA Cloud ADHMC

River Blue ADHMR

Leaf ADHML

Pewter **ADHMP** 

Graphite ADHMG

41

### **FIELD TILES**

UNDULATED

**825** 2.5"x5.1"

**821** 2.5"x10.3"



**844** 5.1"x5.1"

### **TRIMS**

FINISHING EDGES



**501** FE 0.55"x10.3" 500 FE Corner

### **DECORATIVE ACCESSORIES**


206 0.6"x10.3" Liner (One Overglazed Edge)

204 1"x10.3" Quarter Round

**205** Beak

 $\bigcirc$ 

#### **FINISHING TOUCHES**

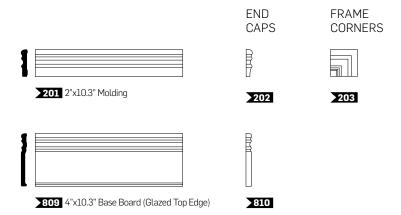

### FIELD TILES

UNDULATED

**825** 2.5"x5.1"



**821** 2.5"x10.3"



**844** 5.1"x5.1"

### **TRIMS**

FINISHING EDGES

500 FE Corner





## **DECORATIVE ACCESSORIES**


206 0.6"x10.3" Liner (One Overglazed Edge)

204 1"x10.3" Quarter Round **205** Beak


### **FINISHING TOUCHES**

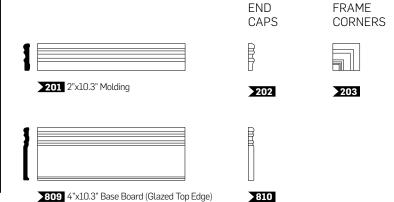

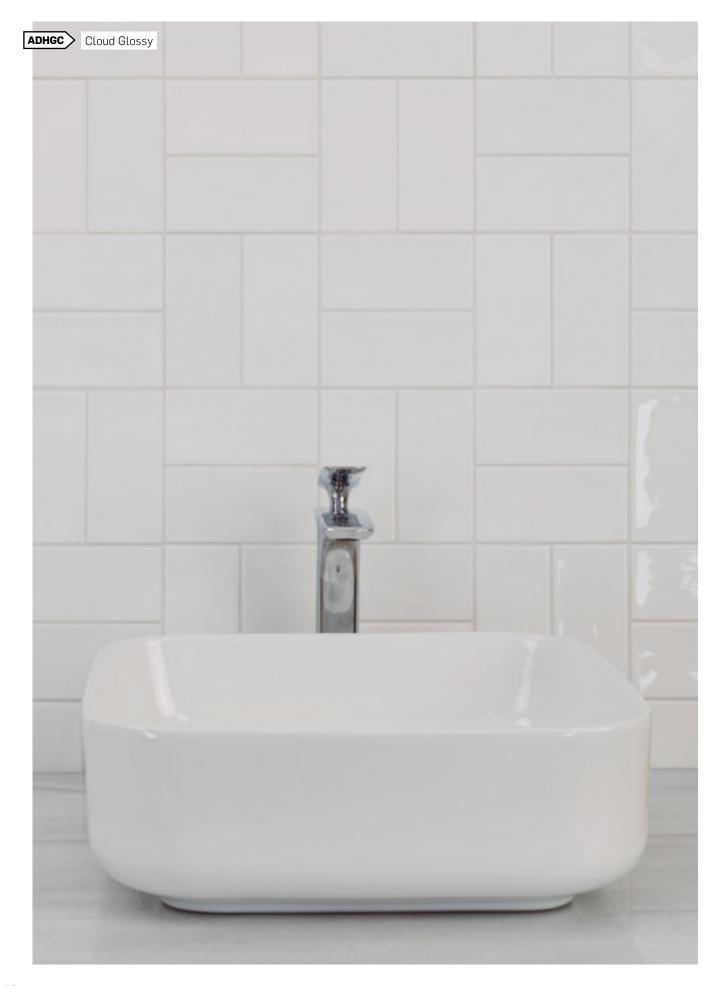


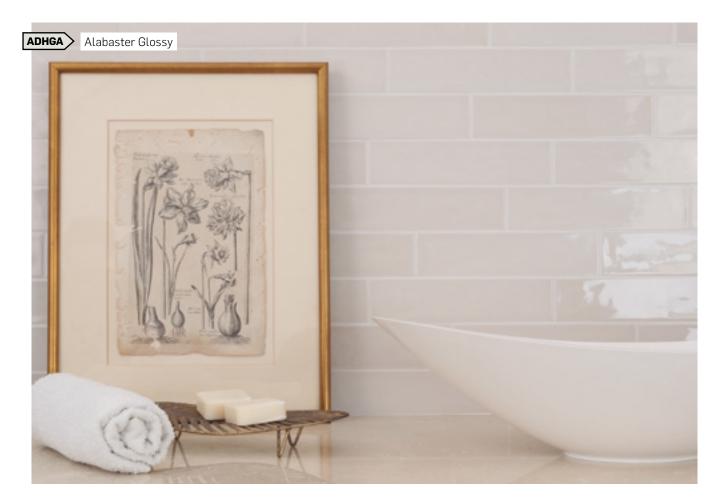




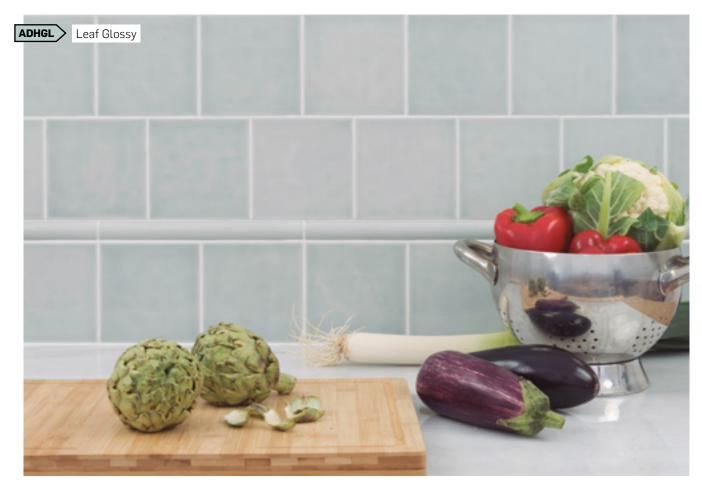




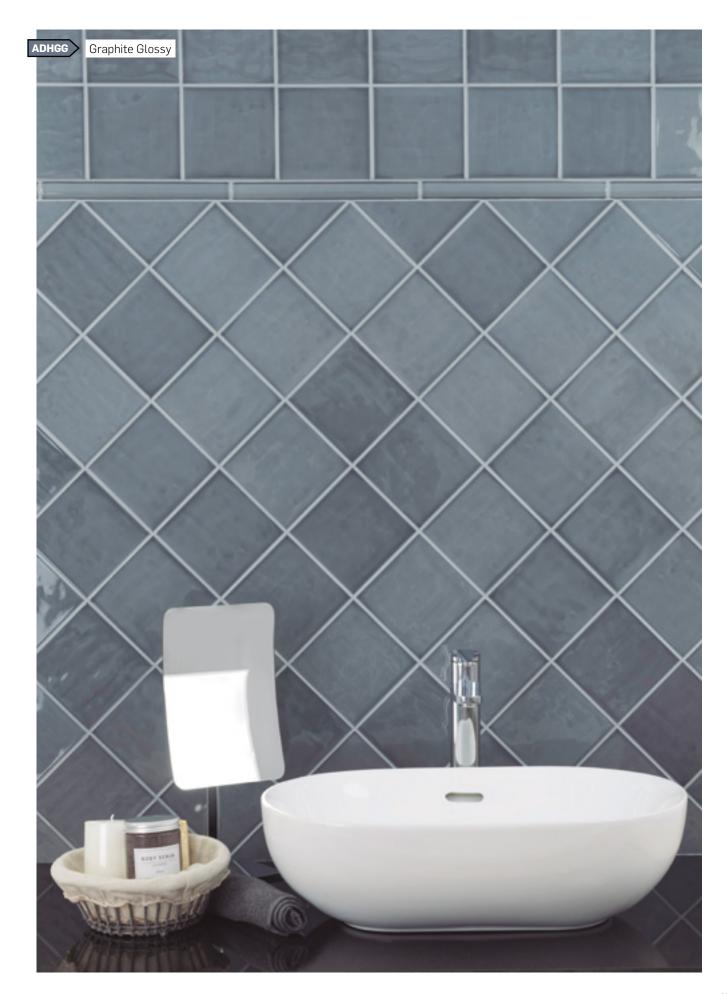


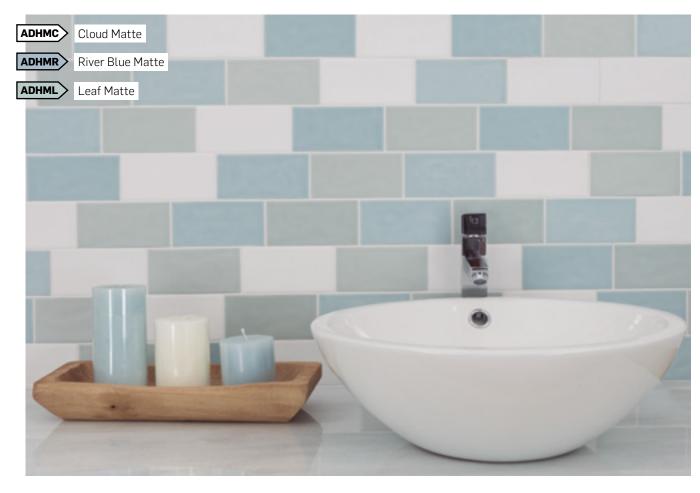



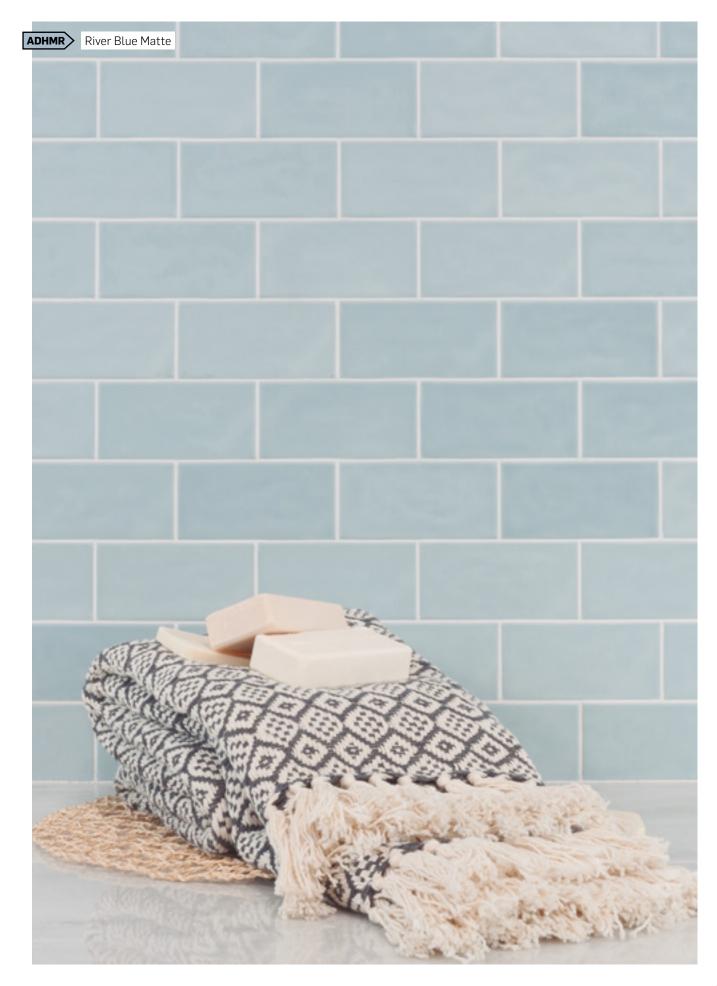



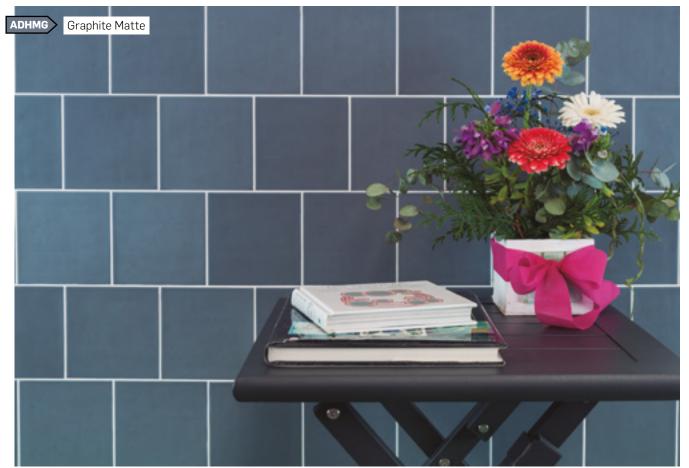



### **EARTH** Matte Crackle

### **Semi-Matte Finish**

#### **AVAILABLE COLORS**

Navajo White ADEW Fawn ADEF Ash Gray ADEG Morning Sky ADEM

ADEW

Find out the product code simply by putting together the color and the item

### FIELD TILES

UNDULATED



**836** 3"x6"




**831** 3"x12"



**836T** 3"x6" Textured







**102** 3"x12" Waves

FINISHING EDGES



FE Corner

**506** FE 0.5"x6" **512** FE 0.6"x12"

**500** FE Corner 6" **501** FE Corner 12"



TEXTURED






**831T** 3"x12" Textured



**101** 3"x6" Waves



### **TRIMS**





### **DECORATIVE ACCESSORIES**




502 6"x6" Energy Deco



503 6"x6" Cosmos Deco




206 1"x6" Bar Liner







### **FINISHING TOUCHES**

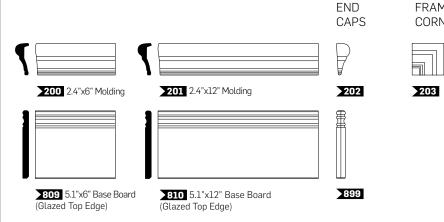





FRAME

**CORNERS** 



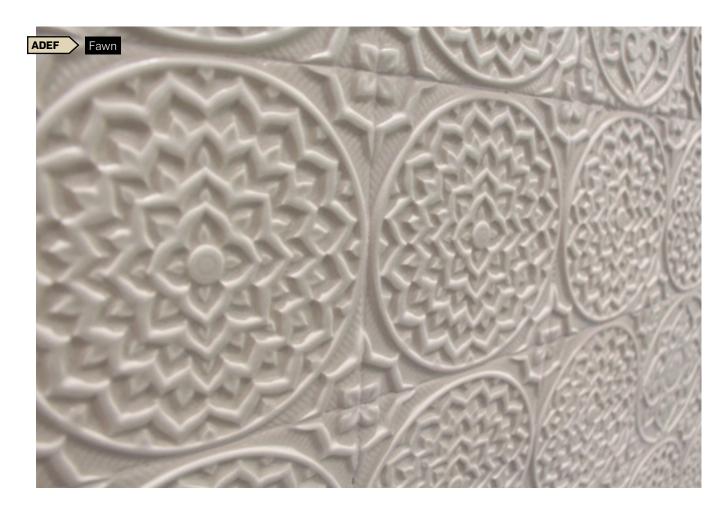

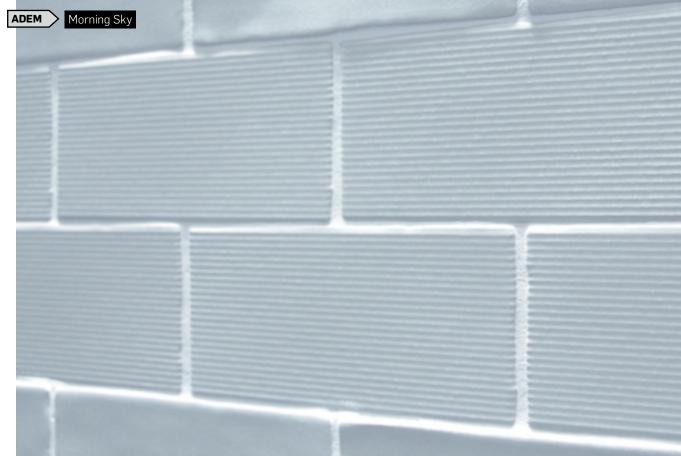

### **OCEAN** Micro Crackle

### **Glossy Finish - Slightly Undulated Surface**

### Find out the product code simply by putting together the color and the item ADOW

#### **AVAILABLE COLORS**

Whitecaps ADOW Sand Dollar ADOS Surf Gray ADOG Top Sail ADOT

### **FIELD TILES**

UNDULATED

**836** 3"x6"



**839** 3"x9"

### **TRIMS**


FINISHING EDGES



FE Corner

**506** FE 0.4"x6" **509** FE 0.4"x9" **500** FE Corner

**GLAZED EDGES** 



**801** 3"x6" SGE 6"

**803** 3"x6" DGE Right

**804** 3"x6" DGE Left

**805** 3"x9" SGE 9" **806** 3"x9" SGE 3"

**807** 3"x9" DGE Right

### **808** 3"x9" DGE Left

### **DECORATIVE ACCESSORIES**



501 6"x6" Persian Deco



502 6"x6" Caspian Deco

**207** 0.8"x6" Stripe Liner

208 1"x6" Bar Liner

209 1"x6" Quarter Round

**210** Beak

### **FINISHING TOUCHES**

**END CAPS** 

202

203

206

FRAME CORNERS

201 1.2"x6" Chair Molding

204 2"x6" Rail Molding

205



809 6"x6" Base Board (Glazed Top Edge)












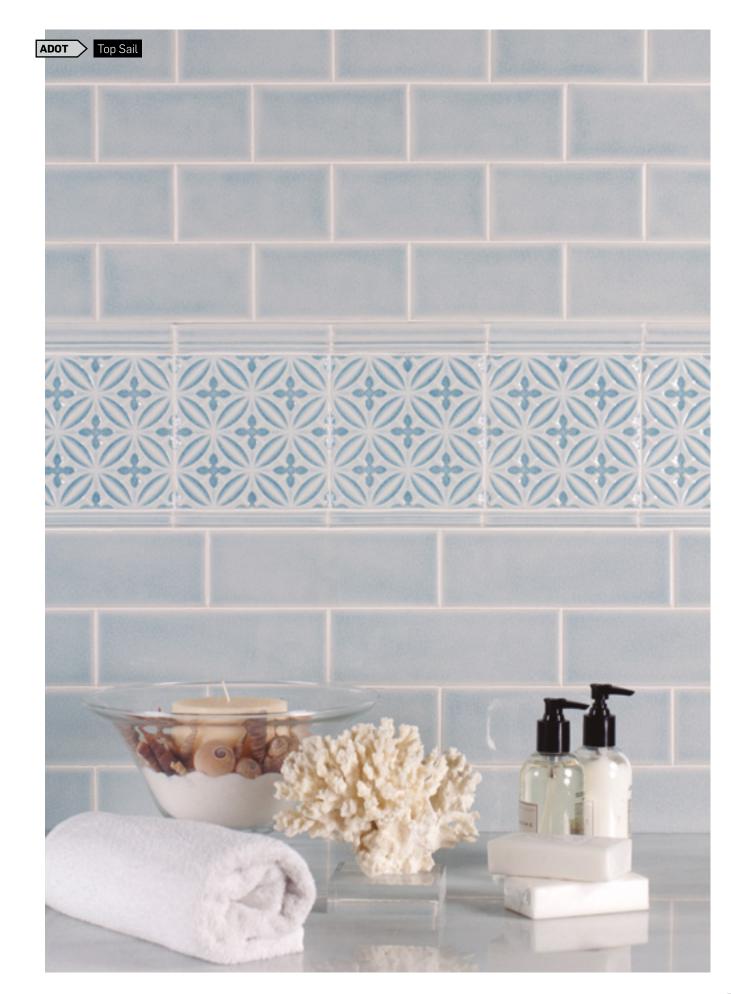

### **HAMPTON** Classic Crackle **Glossy Finish**

Find out the product code simply by putting together the color and the item ADHWH 836

### **AVAILABLE COLORS**

White ADHWH Bone ADHBQ Cadet Gray ADHCG Stratus ADHSG Stellar Blue ADHSB



### FIELD TILES

FLAT **882** 2"x8" **836** 3"x6"



**848** 4"x8"

### **TRIMS**


FINISHING EDGES



FE Corner

**506** FE 0.4"x6" **508** FE 0.4"x8" 500 FE Corner

**BULLNOSES** 



**805** 3"x6" SBN 6" **806** 3"x6" SBN 3"

**807** 3"x6" DBN Right

**808** 3"x6" DBN Left

**810** 4"x8" SBN 4"

**811** 4"x8" SBN 8"

**812** 4"x4" DBN

**822** 2"x2" DBN

**826** 2"x6" SBN 6"

**828** 2"x8" SBN 8"

#### BEVELED



936 3"x6" Beveled



933 3"x3" Beveled (Only comes with Double Glazed Edge)

### **TRIMS**

BEVELED GLAZED EDGES



906 3"x6" Beveled SGE 3" 905 3"x6" Beveled SGE 6" 933 3"x3" Beveled DGE

## **HAMPTON** Classic Crackle

### **Glossy Finish**

**AVAILABLE COLORS** 



### Find out the product code simply by putting together the color and the item ADHWH 836

#### **DECORATIVE ACCESSORIES**



207 1"x6" Bar Liner



220 0.7"x6" Stripe Liner





 $\bigcirc$ 

#### **FINISHING TOUCHES**









304

FRAME CORNERS











59







(Glazed Top Edge)





229







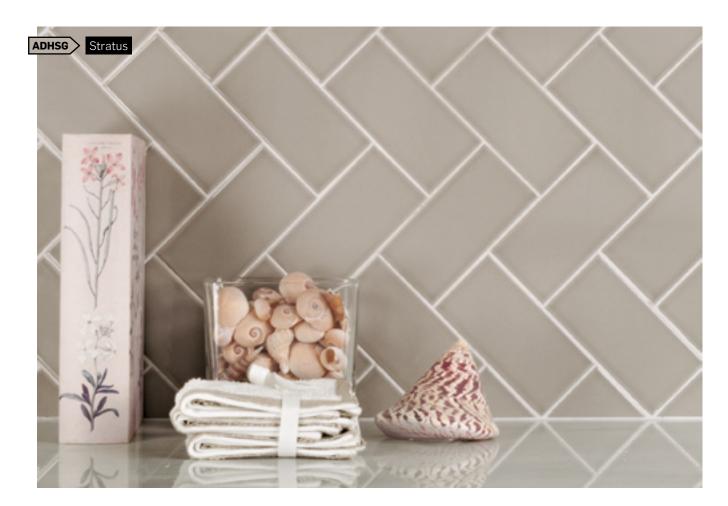

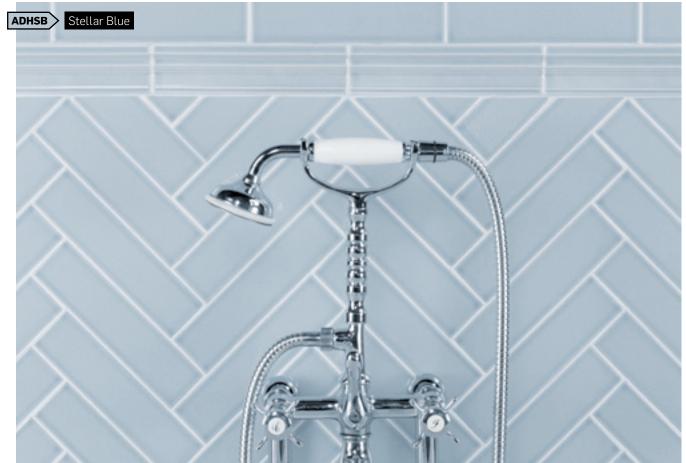

## **DIAMONDS** Dimensional Field

### **Glossy Finish**

**AVAILABLE COLORS** 

White ADNZ Bone ADNB







### **684** 8"x4" Flat



**PILLOW** 

**884** 8"x4" Pillow



881 4"x4" Half Pillow

### **PILLOW SILVER**



ADMS 884 8"x4" Pillow Silver

White and Bone Diamonds are color coordinated with the Neri collection.

# ACCENT DOTS 3/4"x3/4" Ceramic Flat



ADNZ 6840
Accent Dot White



ADNB 6840 Accent Dot Bone



ADNSS 6840







ADNS 6840









White, Bone, Sierra Sand, Silver Mist and Black Flat Dots are color coordinated with the Neri collection.

### ACCENT DOTS 3/4"x3/4"

Ceramic Sphere



64













ADNG 6842






















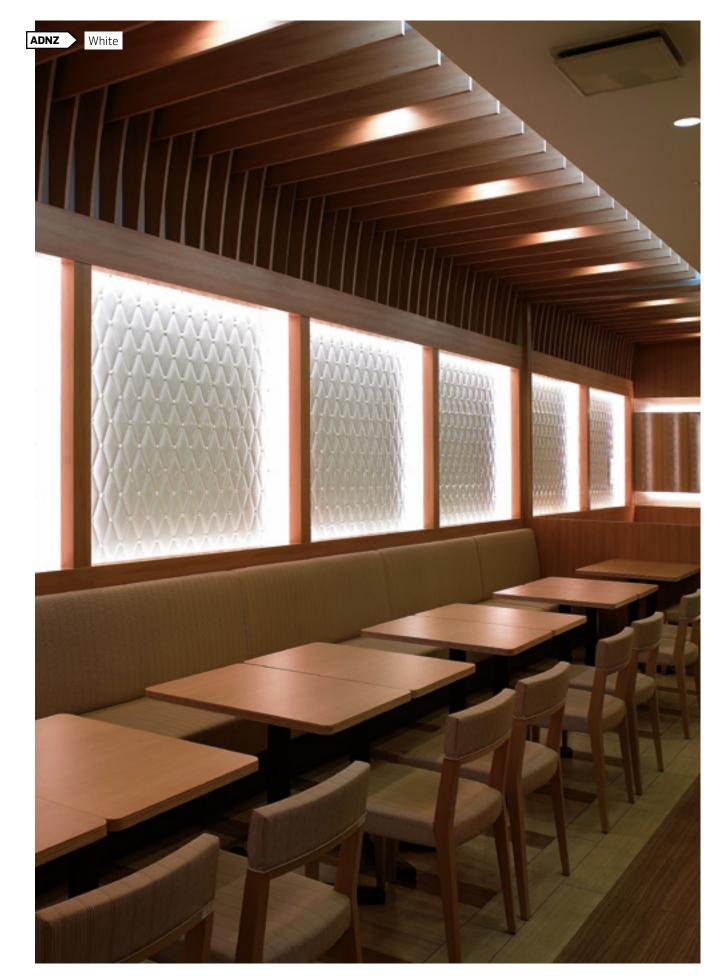

### **MOSAIC** Glazed Porcelain Mosaics **Glossy & Matte Finish**

### PENNY ROUNDS 3/4" | Mesh Mounted 12.38"x11.50"


#### **GLOSSY FINISH**




ADPZ 700 Penny Rounds White




ADPSA 700 Penny Rounds Sage




ADPS 700 Penny Rounds Light Smoke




Penny Rounds Light Blue




ADPSS 700 Penny Rounds Light Sandstone



Penny Rounds Denim




ADPG 700 Penny Rounds Light Gray




ADPB

Light Blue

ADPTE 700 Penny Rounds Teal




ADPT 700 Penny Rounds Taupe




ADPK 700 Penny Rounds Black


### MATTE FINISH



Penny Rounds Matte White




ADPKM 700 Penny Rounds Matte Black

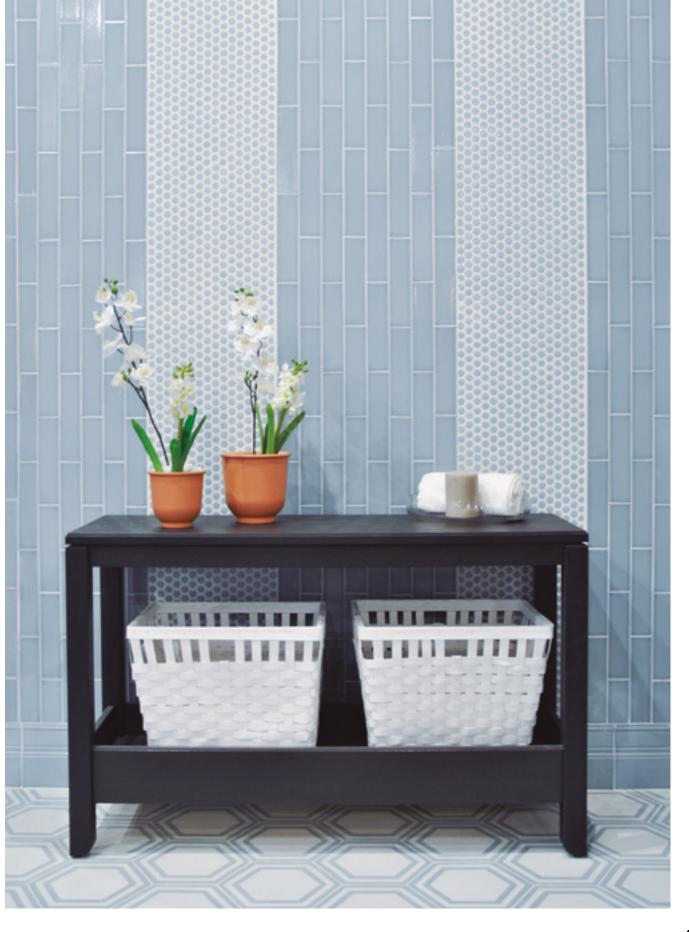

### MOSAIC Glazed Porcelain Mosaics **Glossy & Matte Finish**

### **HEXAGONS 1"** I Mesh Mounted 11.97"x11.69"

### **GLOSSY FINISH**




Hexagons White




ADMSA 600






Hexagons Light Blue



ADMG 600 Hexagons Light Gray







ADMT 600 Hexagons Taupe



Hexagons Teal




ADMS 600 Hexagons Light Smoke




ADMK 600 Hexagons Black

### MATTE FINISH



Hexagons Matte White




ADMKM 600 Hexagons Matte Black



### **FLOOR** Glazed Porcelain Tiles (39% Recycled) **Semi-Matte Finish**


### **SQUARE** 7.4"x7.4"



ADFW 500 Square White



ADFD 500 Square Dark Gray



ADFB 500 Square Bone



ADFA 500 Square Azure




ADFL 500 Square Light Gray



ADFK 500 Square Black

## **PICKETS** 1.5"x9"



ADFW 700 Picket White



ADFM 700 Picket Wood






















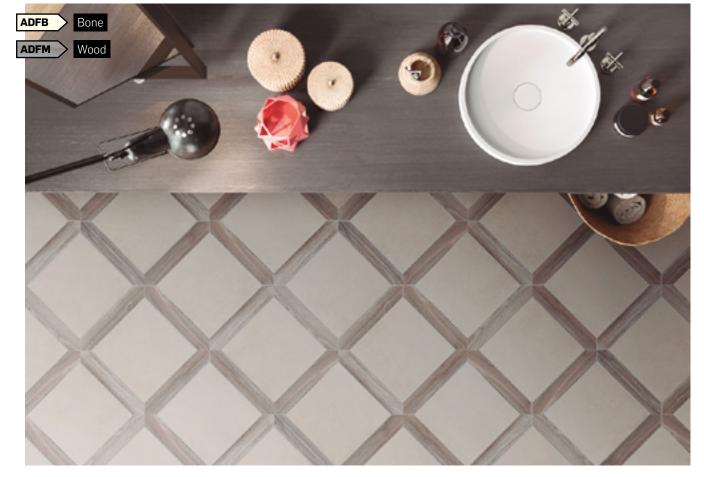


### FLOOR Glazed Porcelain Tiles (39% Recycled) **Semi-Matte Finish**


## **HEX** 8"x9"
















## **HEX DECO** 8"x9"





















## **FLOOR** Glass Floor Tiles (98% Recycled) **Semi-Matte Finish**

## VINTAGE HEX 1"

**MESH MOUNTED** 11.85"x11.41"




ADGL 946 Vintage Hex 1" White




ADGL 947 Vintage Hex 1" Black

**MESH MOUNTED** 11.85"x9.13"





DGL 945 Vintage Hex 1" Flowe

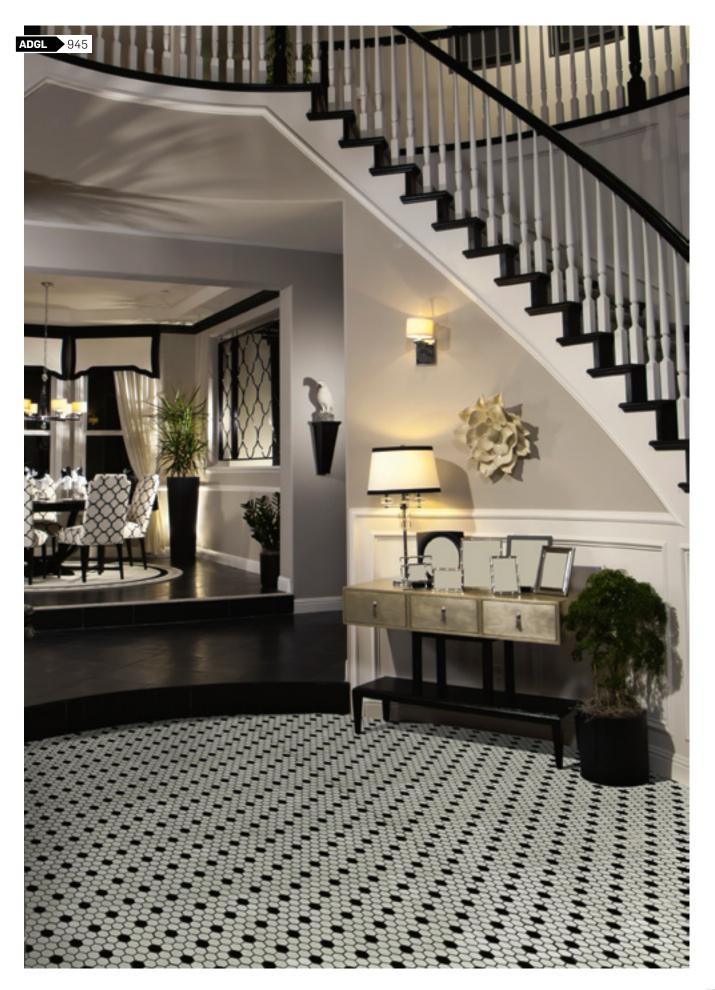



# ADEX USA CUSTOM SHOP CERAMIC TILE CRAFTED COUTURE

Go to **www.adexusa.com/custom-shop/** to customize your own ceramics, you will be able to choose the color, size and finish desired.










**Fine print:** Minimum order quantity - 3,000 SQ FT. **Development fee:** \$300 fee reimbursed upon product order

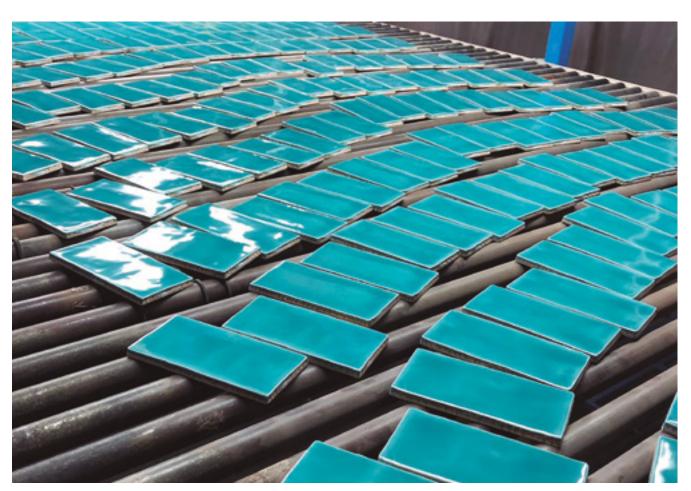



77

## INSTALLATION & MAINTENANCE

### PRIOR TO INSTALLATION

The surface where the product is going to be installed must be clean and level.

We strongly recommend dry laying prior to installation. Blending of the ceramic tile glaze is key to insuring a pleasing overall look to your room. This will resolve any color or size issues prior to installation and will serve as a review of tile placement.

We recommend all our tiles to be installed using the prevailing guidelines as set forth in the TCNA (Tile Council of North America) Handbook and the ANSI (American National Standards Institute) specifications.

Installation should be carried out by experienced personnel.

### **CERAMIC TILES**

### SETTING MATERIALS

For Porcelain Tiles, install with any high-quality adhesive recommended for porcelain tiles. This must also be suitable for the environment they will have to withstand.

Fitting with traditional mortars does not ensure good adhesion.

For Glass tiles, install with any highquality adhesives recommended for glass floor tiles. This must also be suitable for the environment they will have to withstand. Fitting with traditional mortars does not ensure good adhesion.

For Mud Installations, all setting materials and installation methods should be performed using the prevailing guidelines set by the Tile Council of America and the ANSI Specifications.

### **GROUT**

Unsanded grout is typically used for grout joints 1/8" or smaller.

Sanded grout is recommended for grout joints larger than 1/8", as long as the excess material is removed with a damp sponge. Using notched trowels or grout floats may scratch the tile. Special care should be exercised with high sheen surfaces.

We do not recommend contrasting color grouts on our crackled glazed tiles.

The color of the grout should be as close as possible to the color of your tile.

**NOTE:** We use Sanded grout in most of our display boards to keep them intact during shipping.

### METHOD

Follow the appropriate standard ceramic procedures provided by the TCNA (Tile Council of North America) Handbook and the ANSI (American National Standards Institute) specifications.

The surfaces of raised/dimensional decorative accents, borders or liners can be taped off during grouting to facilitate cleanup.

To help keep border, liner and molding grout joints tight, offset the joints between field tile, trim and accent rows.

### SEALING

Sealing is not required for Solid Glazes.

Sealing is mandatory for Crackle Glazes. We recommend sealing our crackled glaze tiles with a solvent based penetrating sealer before and after grouting.

- The sealer penetrates the fine, hairline fissures in the glaze and prevents dirt and dusk darkening the crackle over a period of time.
- 2. Sealing the crackled glaze makes it easier to maintain and clean.
- Proper application of the sealer (wipe off any excess from glazed surface) will not harm or change the appearance of the tile.
- Reapply to grout joints and crackle glazes periodically as needed. When water no longer beads on the surface of the joints, resealing is required.

We recommend the following products and procedures:

Once the tile is mounted on the wall and before grouting, the tile surface must be clean and free of dirt and dust. Use the FILA MP90 - Natural Look Penetrating Sealer (Available in our Price List) which is a solvent based

sealer. Apply an even coat of FILAMP90 with a paintbrush or lambswool applicator pad. Wait 24 Hours to allow the product to cure. Apply grout with a sponge evenly distributing grout over joints. **Do not use a grout float.** 

**NOTE:** When using Contrasting Color Grouts, it is imperative that the tiles are thoroughly sealed to avoid the discoloration from the grout pigment. Please follow the mixing grouting instructions of the Grout Manufacturer.

Once the grouting is completed and allowed to dry, the surface of the tiles must be cleaned using FILA CLEANER
- Neutral Cleaner (Available in our Price List) observing the following guidelines: Dilute to 1:30. Clean the surface with a cloth and scrubbing brush. Remove any residue and rinse thoroughly.

After the thorough cleaning of the surface and grout residue, the tile will need to be resealed using the FILA MP90 - Natural Look Penetrating Sealer (Available in our Price List) observing the following guidelines: Apply an even coat of FILAMP90 with a paintbrush or lambswool applicator pad. Wipe off product excess after 15 minutes, making sure to rub the product and help its complete penetration into the material. Wait 24 Hours to allow the product to cure.

NOTE: Future Sealing of the product should be done if you see any discoloration/darkening in the body of the tile. This will vary by end usage, care and maintenance products and tools used.

If you use any other sealer, please check with the manufacturer for the proper instructions and products to use for sealing crackled glaze ceramic tile.

### MAINTENANCE

For walls: clean tile regularly with a non-abrasive/non-acidic, mild and PH neutral cleaner.

We recommend FILA CLEANER - Neutral Cleaner (Available in our Price List) for all cleaning purposes of our tile.

Sealer: Reapply to grout joints and crackle glazes periodically as needed. When water no longer beads on the surface of the joints, resealing is required.

## PORCELAIN TILES & GLASS MOSAICS

### SETTING MATERIALS

For Porcelain tiles, install with any high-quality adhesive recommended for porcelain tiles. This must also be suitable for the environment they will have to withstand. Fitting with traditional mortars does not ensure good adhesion.

For Glass tiles, install with any high-quality adhesives recommended for glass floor tiles. This must also be suitable for the environment they will have to withstand. Fitting with traditional mortars does not ensure good adhesion.

For Mud Installations, all setting materials and installation methods should be performed using the prevailing guidelines set by the Tile Council of America and the ANSI Specifications.

### GROUT

For Porcelain tiles, we recommend using a minimum of 5/64-inch (0.08" or 2 mm) spacers for a perfect alignment of the tiles. It will also be necessary to make small adjustments by hand to compensate for the natural dimensional variations of the tiles. The joints should be filled in with appropriate materials according to the specifications given by the joint filling material manufacturer. We do not recommend the installation of porcelain tiles without joints.

### METHOD

Follow the appropriate standard ceramic, porcelain and glass tile installation procedures provided by the TCNA (Tile Council of North America) Handbook and the ANSI (American National Standards Institute) specifications.

### MAINTENANCE

Clean the tile regularly with a non-abrasive/ non-acidic, mild and PH neutral cleaner.

We recommend FILA CLEANER - Neutral Cleaner (Available in our Price List) for all cleaning purposes of our tile.

Use products which are suitable to eliminate the remains of mortar, cement, etc. Never use an acidic cleaning agent on newly installed flooring because the acid reacts with the unset cement and can damage the seals, or insoluble compounds can be deposited on the surface of the paving.

Do not use metal scrapers or abrasive pads.

Daily cleaning, after use, will be made particularly easy as it only requires clean water and a very well-wrung cloth. In areas where the tile could be especially messy (kitchens), a detergent with bleach or ammonia can be added to water, although in this case we always recommend giving a final rinse with clear water. Do not use waxes, oils or similar products. In some cases, we can find ourselves in the situation of having to clean very dry and specific stains. which cannot be removed with a damp cloth, but that will disappear if we apply concentrated bleach (the one for floors, not the one used for clothes) and leave it to dry. For especially resistant stains it may be necessary to repeat the process.

### PLEASE NOTE

Due to the nature of our tile, a certain amount of variation in color, shading, surface and texture are to be expected.


Use of the tile constitutes acceptance. We assume no responsibility for installation.

The installation information provided is to be used as a guideline only and should be discussed with a professional and accredited tile installer.

For floor surfaces, water, grease, oil, etc. create slippery conditions. Floor applications with exposure to these conditions require extra caution in product selection and maintenance.

## TECHNICAL GUIDE

Size specifications, tile thicknesses, applications guidelines, cleaning recommendations... and much more!

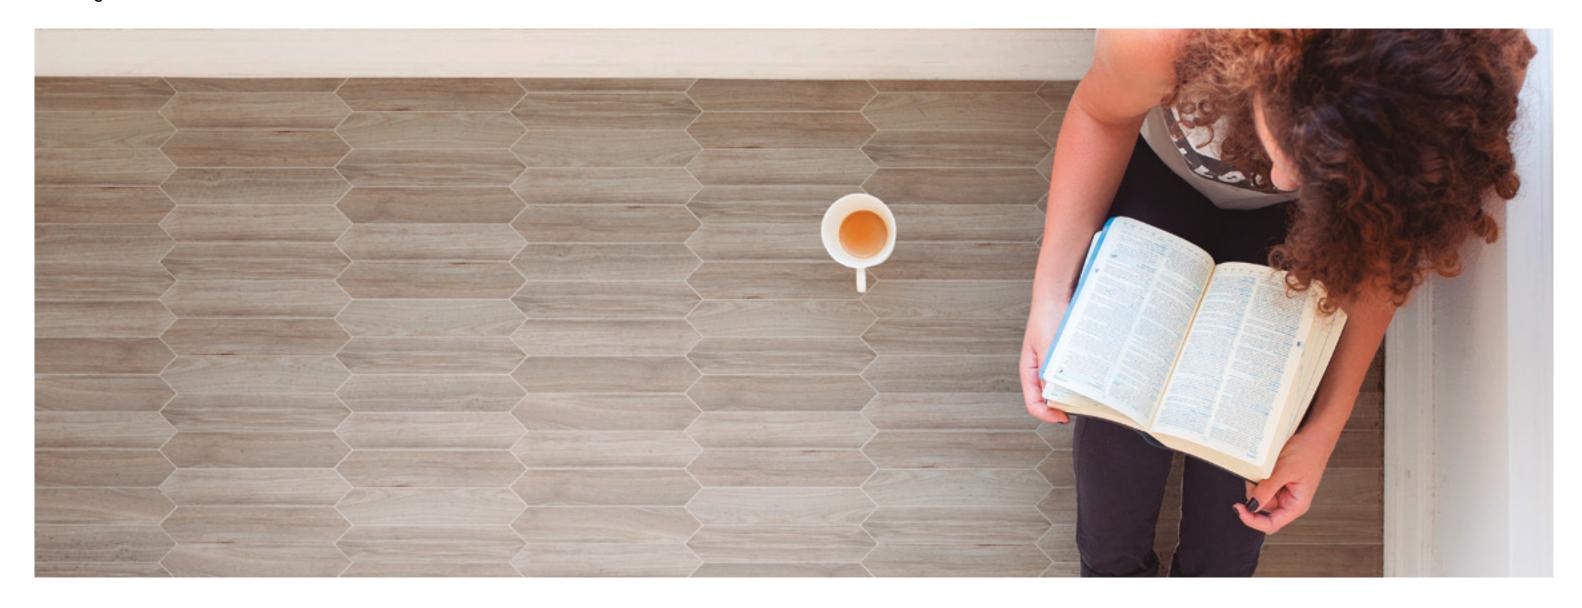

### **ICON LEGEND**

























<sup>\*</sup>For further specifications, please refer to technical features

## **NERI**









FIELD TILES		
SIZE	SIZE SPECIFICATIONS	THICKNESS*
	FLAT TILE	
3"x6"	2.953"x5.906" (75mm x 150mm)	0.256" (6.5mm)
6"x6"	5.906"x5.906" (150mm x 150mm)	0.236" (6mm)
4"x8"	3.937"x7.874" (100mm x 200mm)	0.295" (7.5mm)
2"x8"	1.969"x7.874" (50mm x 200mm)	0.275" (7mm)
3"x12"	2.953"x11.811" (75mm x 300mm)	0.307" (7.8mm)
4"x12"	3.937"x11.811" (100mm x 300mm)	0.295" (7.5mm)
6"x12"	5.906"x11.811" (150mm x 300mm)	0.307" (7.8mm)
6" Arabesque	5.906"x5.906" (150mm x 150mm)	0.299" (7.6mm)
	BEVELED TILE	
3"x6" Beveled	2.953"x5.906" (75mm x 150mm)	0.303" (7.7mm)
4"x8" Beveled	3.937"x7.874" (100mm x 200mm)	0.295" (7.5mm)
DE	CORATIVE ACCESORIES & FINISHING TOUC	CHES
Bar Liner 1"x6"	0.984"x5.905" (25mm x 150mm)	0.709" (18mm)
Bar Liner 1.2"x8"	1.299"x7.913" (33mm x 201mm)	0.709" (18mm)
Flat Liner 1"x6"	1.181"x5.866 (30mm x 149mm)	0.197" (5mm)
Stripe Liner 0.7"x 6"	0.709"x5.905" (18mm x 150mm)	0.472" (12mm)
Stripe Liner 1"x12"	0.827"x11.811" (21mm x 300mm)	0.551" (14mm)
Corner Trim 0.8"x12"	0.827"x11.811" (21mm x 300mm)	0.551" (14mm)
Quarter Round 1"x6"	1.024"x5.945" (26mm x 151mm)	0.354" (9mm)
Quarter Round 1"x8"	1.024"x7.913" (26mm x 201mm)	0.354" (9mm)
Chair Molding 1.4"x6"	1.457"x5.905" (37mm x 150mm)	0.787" (20mm)
Chair Molding 2"x8"	2.008"x7.874" (51mm x 200mm)	0.827" (21mm)
Rail Molding 2"x6"	2.008"x5.945" (51mm x 151mm)	0.669" (17mm)
Rail Molding 2"x8"	2.008"x7.913" (51mm x 201mm)	0.669" (17mm)
Crown Molding 3"x6	2.992"x5.905" (76mm x 150mm)	0.748" (19mm)
Crown Molding 2.8"x12"	2.795"x11.811" (71mm x 300mm)	0.827" (21mm)
Base Board (Glazed Top Edge) 6"x6"	5.905"x5.905" (150mm x 150mm)	0.591" (15mm)
Base Board (Glazed Top Edge) 6"x12"	5.945"x11.811" (151mm x 300mm)	0.669" (17mm)
Cove Base 6"x6"	5.905"x5.905" (150mm x 150mm)	0.787" (20mm)

*Thickness is	understood	as the	higest	point o	f the t	tile.

	APPLICATIONS			
	SUITABLE RESIDENTIAL	SUITABLE COMMERCIAL		
Bathroom Walls	YES	YES		
Shower Walls	YES	YES		
Kitchen Walls	YES	YES		
Countertops	YES	NO		
Fireplace Surrounds	YES	YES		
Outdoor Cooking / Bar Spaces	YES	YES		
Pool Waterlines / Water Fountains	NO	NO		
Floors	NO	NO		
	PERFORMANCE CHARACTERISTICS			
	TEST METHOD ATSM / ISO	RESULT		
Water Absorption	C-373 / 10545-3	Pass		
Breaking Strength	C-648 / 10545-4	Pass		
Chemical Resistance	C-651 / 10545-14	Resistant		
Facial Dimensions	C-499 / 10545-2	Pass		
Range of Thickness	C-499 / 10545-2	Pass		
Warpage	C-485 / 10545-2	Pass		

INSTALLATION		
GROUT JOINT RECOMMENDATION	SHADE VARIATION	
1/8"	V1 - Uniform Appearance	

## CLEANING RECOMMENDATIONS Routine with a non-abrasive/non-acidic, mild and PH neutral cleaner

CHARACTERISTICS		
Glaze	Solid	
Surface Sheen	Glossy	
Texture	Smooth	

Due to the nature of our tile, a certain amount of variation in color, shading, surface and texture are to be expected.

## **STUDIO**









FIELD TILES		
SIZE	SIZE SPECIFICATIONS	THICKNESS*
	FLAT TILE	
2.8"x5.8"	2.874"x5.827" (73mm x 148mm)	0.346" (8.8mm)
5.8"x5.8"	5.827"x5.827" (148mm x 148mm)	0.346" (8.8mm)
3."8x7.8"	3.858"x7.795" (98mm x 198mm)	0.346" (8.8mm)
1.9"x7.8"	1.890"x7.795" (48mm x 198mm)	0.346" (8.8mm)
BEVELED TILE		
6" Arabesque Beveled	5.906"x5.906" (150mm x 150mm)	0.488" (12.4mm)
6" Tear Drop Beveled	5.2362"x5.906" (133mm x 150mm)	0.460" (11.7mm)
FRAMED TILE		
2.8"x5.8" Framed	2.874"x5.827" (73mm x 148mm)	0.543" (13.8mm)

DECORATIVE ACCESORIES & FINISHING TOUCHES		
Ponciana Liner 1"x7.8"	0.984"x7.795" (25mm x 198mm)	0.394" (10mm)
Round Bar Liner 1.2"x7.8"	1.102"x7.795" (28mm x 198mm)	0.669" (17mm)
Stripe Liner 0.7"x7.8"	0.709"x7.795" (18mm x 198mm)	0.512" (13mm)
Quarter Round 1"x5.8"	0.945"x5.827" (24mm x 148mm)	0.394" (10mm)
Rail Molding 2.8"x7.8"	2.992"x7.795" (76mm x 198mm)	1.102" (28mm)
Chair Molding 2"x7.8"	2.008"x7.795" (51mm x 198mm)	0.866" (22mm)
Base Board (Glazed Top Edge) 5.8"x5.8"	5.827"x5.827" (148mm x 148mm)	0.512" (13mm)

<sup>\*</sup>Thickness is understood as the higest point of the tile.

APPLICATIONS			
	SUITABLE RESIDENTIAL	SUITABLE COMMERCIAL	
Bathroom Walls	YES	YES	
Shower Walls	YES	YES	
Kitchen Walls	YES	YES	
Countertops	YES	NO	
Fireplace Surrounds	YES	YES	
Outdoor Cooking / Bar Spaces	YES	YES	
Pool Waterlines / Water Fountains	NO	NO	
Floors	NO	NO	
PERFORMANCE CHARACTERISTICS			
	TEST METHOD ATSM / ISO	RESULT	
Water Absorption	C-373 / 10545-3	Pass	
Breaking Strength	C-648 / 10545-4	Pass	
Chemical Resistance	C-651 / 10545-14	Resistant	
Facial Dimensions	C-499 / 10545-2	Pass	
Range of Thickness	C-499 / 10545-2	Pass	
Warpage	C-485 / 10545-2	Pass	

INSTALLATION		
GROUT JOINT RECOMMENDATION	SHADE VARIATION	
1/8"	V1 - Uniform Appearance	

CLEANING RECOMMENDATIONS
Routine with a non-abrasive/non-acidic, mild and PH neutral cleaner

CHARACTERISTICS		
Glaze	Solid with subtle movement	
Surface Sheen	Glossy	
Texture	Slightly Uindulated	

Due to the nature of our tile, a certain amount of variation in color, shading, surface and texture are to be expected.

## **RIVIERA**









FIELD TILES				
SIZE	SIZE SPECIFICATIONS	THICKNESS*		
	FLAT TILE			
4"x4"	3.917"x3.917" (99.5mm x 99.5mm)	0.295" (7.5mm)		
4"x6"	3.957"x5.913" (100.5mm x 150.2mm)	0.295" (7.5mm)		
8"x8"	7.874"x7.874" (200mm x 200mm)	0.295" (7.5mm)		
DEC	ORATIVE ACCESORIES & FINISHING TOUC	HES		
Stripe Liner 0.7"x8" (One Overglazed Edge)	0.709"x7.913" (18mm x 201mm)	0.512" (13mm)		
Quarter Round 1"x8"	1.024"x7.874" (26mm x 200mm)	0.354" (9mm)		
Chair Molding 2"x8"	2.008"x7.874" (51mm x 200mm)	0.827" (21mm)		
Base Board (Glazed Top Edge) 4"x8"	3.976"x7.874" (101mm x 200mm)	0.591" (15mm)		
	APPLICATIONS			
	SUITABLE RESIDENTIAL	SUITABLE COMMERCIAL		
Bathroom Walls	YES	YES		
Shower Walls	YES	YES		
Kitchen Walls	YES	YES		
Countertops	YES	NO		
Fireplace Surrounds	YES	YES		
Outdoor Cooking / Bar Spaces	YES	YES		
Pool Waterlines / Water Fountains	NO	NO		
Floors	NO	NO		
	PERFORMANCE CHARACTERISTICS			
	TEST METHOD ATSM / ISO	RESULT		
Water Absorption	C-373 / 10545-3	Pass		
Breaking Strength	C-648 / 10545-4	Pass		
Chemical Resistance	C-651 / 10545-14	Resistant		
Facial Dimensions	C-499 / 10545-2	Pass		
Range of Thickness	C-499 / 10545-2	Pass		
Warpage	C-485 / 10545-2	Pass		

INSTALLATION		
GROUT JOINT RECOMMENDATION	SHADE VARIATION	
1/8"	V3 - Moderate Variation	

CLEANING RECOMMENDATIONS
Routine with a non-abrasive/non-acidic, mild and PH neutral cleaner

CHARACTERISTICS		
Glaze	Solid with high color variation	
Surface Sheen	Glossy	
Texture	Smooth	

Due to the nature of our tile, a certain amount of variation in color, shading, surface and texture are to be expected.

This collection is characterized by its shade variation. Some colors in the series have more variation than others. Expect shade variation between the individual field tiles and between field and trim within each color. Due to the shape of the pieces and the nature of production, this is especially true for variation between field and trims. Trim pieces like quarter rounds, finishing edges and other moldings may have more glaze pooling and different pooling effects than other pieces. Expect variation within each run, and from production to production. IT IS IMPORTANT TO BLEND TILE WITHIN EACH CARTON AND FROM MULTIPLE CARTONS DURING INSTALLATION. This is best achieved by laying out the material prior to installation.

 $\mathbf{8}$ 

<sup>\*</sup>Thickness is understood as the higest point of the tile.

## **HABITAT**





Pass





FIELD TILES			
SIZE	SIZE SPECIFICATIONS	THICKNESS*	
UNDULATED TILE			
2.5"x5.1"	2.520"x5.118" (64mm x 130mm)	0.295" (7.5mm)	
2.5"x10.3"	2.520"x10.315" (64mm x 262mm)	0.303" (7.7mm)	
5.1"x5.1"	5.118"x5.118" (130mm x 130mm)	0.303" (7.7mm)	
DEC	CORATIVE ACCESORIES & FINISHING TOUC	HES	
Liner (One Overglazed Edge) 0.6"x10.3"	0.630"x10.315"(16mm x 262mm)	0.354" (9mm)	
Quarter Round 1"x10.3"	1.024"x10.315" (26mm x 262mm)	0.394" (10mm)	
Molding 2"x10.3"	2.008"x10.315" (51mm x 262mm)	0.591" (15mm)	
Base Board (Glazed Top Edge) 4"x10.3"	3.976"x10.315" (101mm x 262mm)	0.551" (14mm)	
APPLICATIONS			
	SUITABLE RESIDENTIAL	SUITABLE COMMERCIAL	
Bathroom Walls	YES	YES	
Shower Walls	YES	YES	
Kitchen Walls	YES	YES	
Countertops	YES	NO	
Fireplace Surrounds	YES	YES	
Outdoor Cooking / Bar Spaces	YES	YES	
Pool Waterlines / Water Fountains	NO	NO	
Floors	NO	NO	
	PERFORMANCE CHARACTERISTICS		
	TEST METHOD ATSM / ISO	RESULT	
Water Absorption	C-373 / 10545-3	Pass	
Breaking Strength	C-648 / 10545-4	Pass	
Chemical Resistance	C-651 / 10545-14	Resistant	
Facial Dimensions	C-499 / 10545-2	Pass	
Range of Thickness	C-499 / 10545-2	Pass	
		_	

C-485 / 10545-2

*Thickness	is understood	ac tha biasct	naint af tha til a
LUICKHESS	. 15 UNDELSTOOD	as the moest	DOINL OF THE THE

Warpage

INSTALLATION		
GROUT JOINT RECOMMENDATION	SHADE VARIATION	
1/8"	V3 - Moderate Variation	

CLEANING RECOMMENDATIONS
Routine with a non-abrasive/non-acidic, mild and PH neutral cleaner

CHARACTERISTICS		
Glaze	Solid with subtle movement and high color variation	
Surface Sheen	Glossy and Matte	
Texture	Slightly Uindulated	

Due to the nature of our tile, a certain amount of variation in color, shading, surface and texture are to be expected.

This collection is characterized by its shade variation. Some colors in the series have more variation than others. Expect shade variation between the individual field tiles and between field and trim within each color. Due to the shape of the pieces and the nature of production, this is especially true for variation between field and trims. Trim pieces like quarter rounds, finishing edges and other moldings may have more glaze pooling and different pooling effects than other pieces. Expect variation within each run, and from production to production. IT IS IMPORTANT TO BLEND TILE WITHIN EACH CARTON AND FROM MULTIPLE CARTONS DURING INSTALLATION. This is best achieved by laying out the material prior to installation.

## **EARTH**









FIELD TILES			
SIZE	SIZE SPECIFICATIONS		
UNDULATED TILE			
3"x6"	2.953"x5.905" (75mm x 150mm)	0.366" (9.3mm)	
3"x12"	2.953"x11.811" (75mm x 300mm)	0.366" (9.3mm)	
TEXTURED TILE			
3"x6" Textured	2.953"x5.905" (75mm x 150mm)	0.366" (9.3mm)	
3"x12" Textured	2.953"x11.811" (75mm x 300mm)	0.366" (9.3mm)	
3"x6" Waves	2.953"x5.905" (75mm x 150mm) 0.366" (9.3mm)		
3"x12" Waves	2.953"x11.811" (75mm x 300mm)	0.366" (9.3mm)	

DECORATIVE ACCESORIES & FINISHING TOUCHES			
Bar Liner 1"x6"	0.984"x5.905" (25mm x 150mm)	0.669" (17mm)	
Bar Liner 1"x12"	0.984"x11.771" (25mm x 299mm) 0.669" (17mm)		
Quarter Round 1"x6"	0.905"x5.827" (23mm x 148mm) 0.394" (10mm)		
Molding 2.4"x6"	2.401"x5.827" (61mm x 148mm)	1.102" (28mm)	
Molding 2.4"x12"	2.401"x11.771" (61mm x 299mm)	1.102" (28mm)	
Base Board (Glazed Top Edge) 5.1"x6"	5.157"x5.827" (131mm x 148mm) 0.512" (13mm)		
Base Board (Glazed Top Edge) 5.1"x12"	5.118"x11.811" (130mm x 300mm)	0.512" (13mm)	

<sup>\*</sup>Thickness is understood as the higest point of the tile.

APPLICATIONS			
	SUITABLE RESIDENTIAL		SUITABLE COMMERCIAL
Bathroom Walls*	YE	ES .	YES
Shower Walls*	YE	ES .	YES
Kitchen Walls*	YE	ES .	YES
Countertops	N	0	NO
Fireplace Surrounds*	YE	S	YES
Outdoor Cooking / Bar Spaces*	YE	:S	YES
Pool Waterlines / Water Fountains	N	0	NO
Floors	NO		NO
	TEST METHOD ATSM / ISO RESULT		
Water Absorption	C-373 / I	10545-3	Pass
Breaking Strength	C-648 / 10545-4		Pass
Chemical Resistance**	C-651 / 1	0545-14	Resistant
Facial Dimensions	C-499 / 10545-2 Pass		Pass
Range of Thickness	C-499 / I	10545-2	Pass
Warpage	C-485 / 10545-2		Pass
	INSTAL	LATION	
GROUT JOINT RECOMMEND	GROUT JOINT RECOMMENDATION SHADE VARIATION		SHADE VARIATION
3/8"	3/8" V:		√1 - Uniform Appearance
CLEANING RECOMMENDATIONS			
Routine with a non-abrasive/non-acidic, mild and PH neutral cleaner			
SEALING GUIDELINES			
Solvent based penetrating sealer suitable for ceramic tiles			

CHARACTERISTICS

Crackle with subtle movement

Semi-Matte

Slightly Undulated

Glaze

Surface Sheen

Texture

<sup>\*</sup>Crackle tiles must be properly sealed. (See SEALING instructions in INSTALLATION & MAINTENANCE guidelines)

<sup>\*\*</sup> In order to accomplish this test, the tile must be properly sealed.

Due to the nature of our tile, a certain amount of variation in color, shading, surface and texture are to be expected.

## **OCEAN**









FIELD TILES				
SIZE	SIZE SPECIFICATIONS	THICKNESS*		
	UNDULATED TILE			
3"x6"	2.913"x5.827" (74mm x 148mm)	0.307" (7.8mm)		
3"x9"	2.913"x8.740" (74mm x 222mm)	0.319" (8.1mm)		
DEC	ORATIVE ACCESORIES & FINISHING TOUC	HES		
Stripe Liner 0.8"x6"	0.787"x5.827" (20mm x 148mm)	0.472" (12mm)		
Bar Liner 1"x6	0.984"x5.866" (25mm x 149mm)	0.630" (16mm)		
Quarter Round 1"x6"	0.984"x5.827" (25mm x 148mm)	0.354" (9mm)		
Chair Molding 1.2"x6"	1.181"x5.866" (30mm x 149mm)	0.787" (20mm)		
Rail Molding 2"x6"	1.968"x5.827" (50mm x 148mm)	0.945" (24mm)		
Base Board (Glazed Top Edge) 6"x6"	5.866"x5.866" (149mm x 149mm)	0.551" (14mm)		
APPLICATIONS				
	SUITABLE RESIDENTIAL	SUITABLE COMMERCIAL		
Bathroom Walls**	YES	YES		
Shower Walls**	YES	YES		
Kitchen Walls**	YES	YES		
Countertops	NO	NO		
Fireplace Surrounds**	YES	YES		
Outdoor Cooking / Bar Spaces**	YES	YES		
Pool Waterlines / Water Fountaines	NO	NO		
Floors	NO	NO		
PERFORMANCE CHARACTERISTICS				
	TEST METHOD ATSM / ISO	RESULT		
Water Absorption	C-373 / 10545-3	Pass		
Breaking Strength	C-648 / 10545-4	Pass		
Chemical Resistance***	C-651 / 10545-14	Resistant		
Facial Dimensions	C-499 / 10545-2	Pass		
Range of Thickness	C-499 / 10545-2	Pass		
Warpage	C-485 / 10545-2	Pass		

INSTALLATION		
GROUT JOINT RECOMMENDATION	SHADE VARIATION	
1/8"	V1 - Uniform Appearance	

CLEANING RECOMMENDATIONS		
Routine with a non-abrasive/non-acidic, mild and PH neutral cleaner		
SEALING GUIDELINES		
Solvent based penetrating sealer suitable for ceramic tiles		

CHARACTERISTICS		
Glaze	Crackle with subtle movement	
Surface Sheen	Glossy	
Texture	Slightly Undulated	

<sup>\*</sup>Thickness is understood as the higest point of the tile.

<sup>\*\*</sup>Crackle tiles must be properly sealed. (See SEALING instructions in INSTALLATION & MAINTENANCE guidelines).

<sup>\*\*\*</sup> In order to accomplish this test, the tile must be properly sealed.

Due to the nature of our tile, a certain amount of variation in color, shading, surface and texture are to be expected.

## **HAMPTON**









FIELD TILES		
SIZE	SIZE SPECIFICATIONS	THICKNESS*
	FLAT TILE	
3"x6"	2.953"x5.906" (75mm x 150mm)	0.256" (6.5mm)
2"x8"	1.969"x7.874" (50mm x 200mm)	0.275" (7mm)
4"x8"	3.937"x7.874" (100mm x 200mm)	0.295" (7.5mm)
	BEVELED TILE	
3"x6" Beveled	2.953"x5.906" (75mm x 150mm)	0.303" (7.7mm)
DEC	CORATIVE ACCESORIES & FINISHING TOUC	CHES
Bar Liner 1"x6"	0.984"x5.905" (25mm x 150mm)	0.709" (18mm)
Stripe Liner 0.7"x6"	0.709"x5.905" (18mm x 150mm)	0.472" (12mm)
Quarter Round 1"x6"	1.024"x5.905" (26mm x 150mm)	0.354" (9mm)
Chair Molding 1.4"x6"	1.457"x5.905" (37mm x 150mm)	0.787" (20mm)
Chair Molding 2"x8"	1.968"x7.874" (50mm x 200mm)	0.827" (21mm)
Rail Molding 2"x6"	2.007"x5.945" (51mm x 151mm)	0.669" (17mm)
Crown Molding 3"x6"	2.992"x5.905" (76mm x 150mm)	0.748" (19mm)
Base Board (Glazed Top Edge) 6"x6"	5.905"x5.905" (150mm x 150mm)	0.591" (15mm)
	APPLICATIONS	
	SUITABLE RESIDENTIAL	SUITABLE COMMERCIAL
Bathroom Walls**	YES	YES
Shower Walls**	YES	YES
Kitchen Walls**	YES	YES
Countertops	NO	NO
Fireplace Surrounds**	YES	YES
Outdoor Cooking / Bar Spaces**	YES	YES
Pool Waterlines / Water Fountaines	NO	NO
Floors	NO	NO
	PERFORMANCE CHARACTERISTICS	
	TEST METHOD ATSM / ISO	RESULT
Water Absorption	C-373 / 10545-3	Pass
Breaking Strength	C-648 / 10545-4	Pass
Breaking Strength  Chemical Resistance***	C-648 / 10545-4 C-651 / 10545-14	Resistant
	·	
Chemical Resistance***	C-651 / 10545-14	Resistant

INSTALLATION		
GROUT JOINT RECOMMENDATION	SHADE VARIATION	
1/8"	V1 - Uniform Appearance	

CLEANING RECOMMENDATIONS		
Routine with a non-abrasive/non-acidic, mild and PH neutral cleaner		
SEALING GUIDELINES		
Solvent based penetrating sealer suitable for ceramic tiles		

CHARACTERISTICS		
Glaze	Crackle	
Surface Sheen	Glossy	
Texture	Smooth	

<sup>\*</sup>Thickness is understood as the higest point of the tile.

 $<sup>{\</sup>tt **Crackle\ tiles\ must\ be\ properly\ sealed.}\ (See\ SEALING\ instructions\ in\ INSTALLATION\ \&\ MAINTENANCE\ guidelines).}$ 

<sup>\*\*\*</sup> In order to accomplish this test, the tile must be properly sealed.

Due to the nature of our tile, a certain amount of variation in color, shading, surface and texture are to be expected.

## **DIAMONDS**









FIELD TILES				
SIZE	SIZE SPECIFICATIONS	THICKNESS*		
	FLAT TILE			
8"x4"	7.834"x3.937" (199mm x 100mm)	0.354" (9mm)		
	PILLOW TILE			
8"x4" Pillow	7.834"x3.937" (199mm x 100mm)	0.567" (14.4mm)		
	FLAT DOT			
3/4"x3/4"	0.827"x0.827" (21mm x 21mm)	0.354" (9mm)		
	SPHERE DOT			
3/4"x3/4"	0.787"x0.787" (20mm x 20mm)	0.622" (15.8mm)		
APPLICATIONS				
	SUITABLE RESIDENTIAL	SUITABLE COMMERCIAL		
Bathroom Walls	YES	YES		
Shower Walls	YES	YES		
Kitchen Walls	YES	YES		
Countertops	NO	NO		
Fireplace Surrounds**	YES	YES		
Outdoor Cooking / Bar Spaces	YES	YES		
Pool Waterlines / Water Fountaines	NO	NO		
Floors	NO	NO		
	PERFORMANCE CHARACTERISTICS			
	TEST METHOD ATSM / ISO	RESULT		
Water Absorption	C-373 / 10545-3	Pass		
Breaking Strength	C-648 / 10545-4	Pass		
Chemical Resistance	C-651 / 10545-14	Resistant		
Facial Dimensions	C-499 / 10545-2	Pass		
Range of Thickness	C-499 / 10545-2	Pass		
Warpage	C-485 / 10545-2	Pass		

INSTALLATION		
GROUT JOINT RECOMMENDATION	SHADE VARIATION	
1/8"	V1 - Uniform Appearance	

CLEANING RECOMMENDATIONS
Routine with a non-abrasive/non-acidic, mild and PH neutral cleaner

CHARACTERISTICS		
Glaze	Solid	
Surface Sheen	Glossy	
Texture	Smooth	

<sup>\*</sup>Thickness is understood as the higest point of the tile.

<sup>\*\*</sup>This usage excludes the Silver Diamonds.

Due to the nature of our tile, a certain amount of variation in color, shading, surface and texture are to be expected.

## **MOSAIC**













FIELD TILES			
SIZE	SIZE SPECIFICATIONS	THICKNESS*	
	MESH MOUNTED		
Penny Rounds 3/4" 12.38" x 11.50"	12.362"x11.496" (314mm x 292mm)	0.157" (4mm)	
Hexagons 1" 11.97" x 11.69"	11.967"x11.693" (303.97mm x 297mm)	0.236" (6mm)	
	APPLICATIONS		
SUITABLE RESIDENTIAL SUITABLE COMMERCIAL			
Bathroom Walls	YES	YES	
Shower Walls	YES	YES	
Kitchen Walls	YES	YES	
Countertops	NO	NO	
Fireplace Surrounds	YES	YES	
Outdoor Cooking / Bar Spaces	YES	YES	
Pool Waterlines / Water Fountaines**	YES	YES	
Floors***	YES	NO	
	PERFORMANCE CHARACTERISTICS		
	TEST METHOD ATSM / ISO	RESULT	
Water Absorption	C-373 / 10545-3	0.00%	
Breaking Strength	C-648 / 10545-4	N/A	
Chemical Resistance	C-651 / 10545-14	Resistant	
Facial Dimensions	C-499 / 10545-2	Avg. 18.741mm	
Range of Thickness	C-499 / 10545-2	Avg. 4.924mm	
Warpage	C-485 / 10545-2	0	

INSTALLATION			
GROUT JOINT RECOMMENDATION	SHADE VARIATION		
5/64"	V2 - Slight Variation		

OL FANING RECOMMENDATIONS
CLEANING RECOMMENDATIONS
Routine with a non-abrasive/non-acidic, mild and PH neutral cleaner

CHARACTERISTICS			
Glaze	Solid with subtle movement		
Surface Sheen	Glossy & Matte		
Texture	Slightly Undulated		

<sup>\*</sup>Thickness is understood as the higest point of the tile.

<sup>\*\*</sup>Not recommended for freeze-thaw environments.

<sup>\*\*\*</sup> Only Matte Colors (White and Black) and for residential use.

Due to the nature of our tile, a certain amount of variation in color, shading, surface and texture are to be expected.

## **FLOOR**













FIELD TILES				
SIZE	THICKNESS*			
GLAZED PORCELAIN TILES				
Square 7.4"x7.4"	0.236" (6mm)			
Picket 1.5"x9"	0.236" (6mm)			
Hex 8"x9"	0.275" (7mm)			
Hex Deco 8"x9"	0.275" (7mm)			
RECYCLED GLASS				
Vintage Hex 1" 11.85"x11.41"	0.173" (4.4mm)			
Vintage Hex 1" Flower 11.85"x9.13"	0.173" (4.4mm)			

APPLICATIONS					
	SUITABLE RESIDENTIAL		SUITABLE COMMERCIAL		
	GLAZED PORCELAIN TILES	RECYCLED GLASS	GLAZED PORCELAIN TILES	RECYCLED GLASS	
Bathroom Walls	YES	YES	YES	YES	
Shower Walls	YES	YES	YES	YES	
Kitchen Walls	YES	YES	YES	YES	
Countertops	YES	YES	NO	NO	
Fireplace Surrounds	YES	YES	YES	YES	
Outdoor Cooking / Bar Spaces	YES	YES	YES	YES	
Pool Waterlines / Water Fountaines	NO	YES	NO	YES	
Floors	YES	YES	NO	NO	

PERFORMANCE CHARACTERISTICS					
	TEST METHOD ATCM / ISO	RESULT			
	TEST METHOD ATSM / ISO		ELAIN TILES	RECYCLED GLASS	
Target DCOF * >.42Wet	ANSI A137-2012	>0.50		>0.42	
	ANSI A137.1-2008 UNE EN ISO 10545-7	White	4		
		Bone	3		
PEI Rating		Light Gray	3		
		Dark Gray	3	F	
		Azure	3	5	
		Black	2		
		Wood	3		
		Deco	3		
Moisture Absorption	ASTM C-373 UNE EN ISO 10545-3	≤ 0.50%*		< 0.50%	
Break Strength	ASTM C-648 UNE EN ISO 10545-4	Pass		Pass	
Chemical Resistance to Staining	ASTM C-650 UNE EN ISO 10545-14	Ressistant		Ressistant	
Freeze-Thaw Resistance	ASTM C-1026 UNE EN ISO 10545-12	Yes		Yes	

INSTALLATION				
GROUT JOINT RECOMMENDATION		SHADE VARIATION		
Minimum of 5/64"		GLAZED PORCELAIN TILES		RECYCLED GLASS
		V1 - Uniform Appearance		V2 - Slight Variation
CLEANING RECOMMENDATIONS				
Routine with a non-abrasive/non-acidic, mild and PH neutral cleaner				
CHARACTERISTICS				
	GLAZED PORCELAIN TILES			RECYCLED GLASS
Glaze	Solid			Solid
Surface Sheen	Semi-Matte			Semi-Matte
Texture	Smooth			Slightly Undulated

<sup>\*</sup>Thickness is understood as the higest point of the tile.

Due to the nature of our tile, a certain amount of variation in color, shading, surface and texture are to be expected.



### CONTACT US

### Corporate Headquarters South East Distribution Center

9450 N.W.12th St. Miami, FL. 33172 Office: 305-513-4633 Fax: 305-513-4634 customerservice@adexusa.com

**West Coast Distribution Center** 2344 E. Walnut Ave. Fullerton, CA. 92831 Office: 714-773-0197 Fax: 714-773-9352 customerservicewest@adexusa.com

North East Distribution Center 1000 Wall St. W. Lyndhurst, NJ. 07071 Office: 201-355-8772 Fax: 201-636-2802 customerservicene@adexusa.com







Our company has an environmental management system in place according to the Norm ISO 14001 certified by European Quality Assurance (EQA)