

IRIS U.S. Corporate Office 1360 South Vernon St. Anaheim, CA 92805

Customer Service (800) 323-9906

WWW.IRISUS.COM









# Runway



BLANC



## Runwciy Collection

The fabric look mixed with the grunge graphic style, makes **Runway** the best choice to create contemporary unique environment of the utmost character.

A modern style suitable for urban atmosphere with a fancy retro touch. Neutral colors range from the lighter shade of **Blanc** to the darker shade of **Tortore**, for livings that will leave a lasting impression.



### Discontinued


















A PREVEN



ADD A RUSTIC TOUCH

TO YOUR CONTEMPORARY STYLE







FLOOR // TORTORE HONED / 18" X 36"

12





#### Discontinued









### **LET'S CONTINUE OUR JOURNEY**

\*\*\*\*\*\*

------

0. 100

37.111

AN TA BE AN OF

-----

FROM A COUNTRY RUSTIC TO A CONTEMPORARY URBAN STYLE

ALKEKANA ----------------RESIDENCES --------------REFERENCES I BRADRADUBRANNA | BURRELLUNE .... ------NARAR FOR THE REAL PROPERTY IN CONTRACTOR OF THE PROPERTY OF T BREATER BERTER -----WALKSBURGER STREET ---------------REAL PROPERTY LEARING TRADUCTOR DE LA CALCOLINA DA CA -----\*\*\*\*\*\*\*\*\*\*\*\*\*\*\*\* MINUSTRANSCORPORT ---------------BRELED RURAN REVERSE AND -----Record Constant of ANALY DISTORNEY CONSISTS \* ------TRADETO A DESCRIPTION OF TAXABLE PARTY. A REAL PROPERTY AND A REAL








## SOFT COLOR bold style









And the















LET'S TAKE OUR JOURNEY TO THE SEA

LIGHT AND SOFT SHADES OF ASH AND BLANC WILL BRING YOU COMFORT AND RELAXATION





LOOR // ASH LAPPATO / 18" X 36"

1

9 0 0 9 9

10

.0 .0 .0 10

24

3 3 3 0







LOOR // BLANC LAPPATO / 18" X 36"





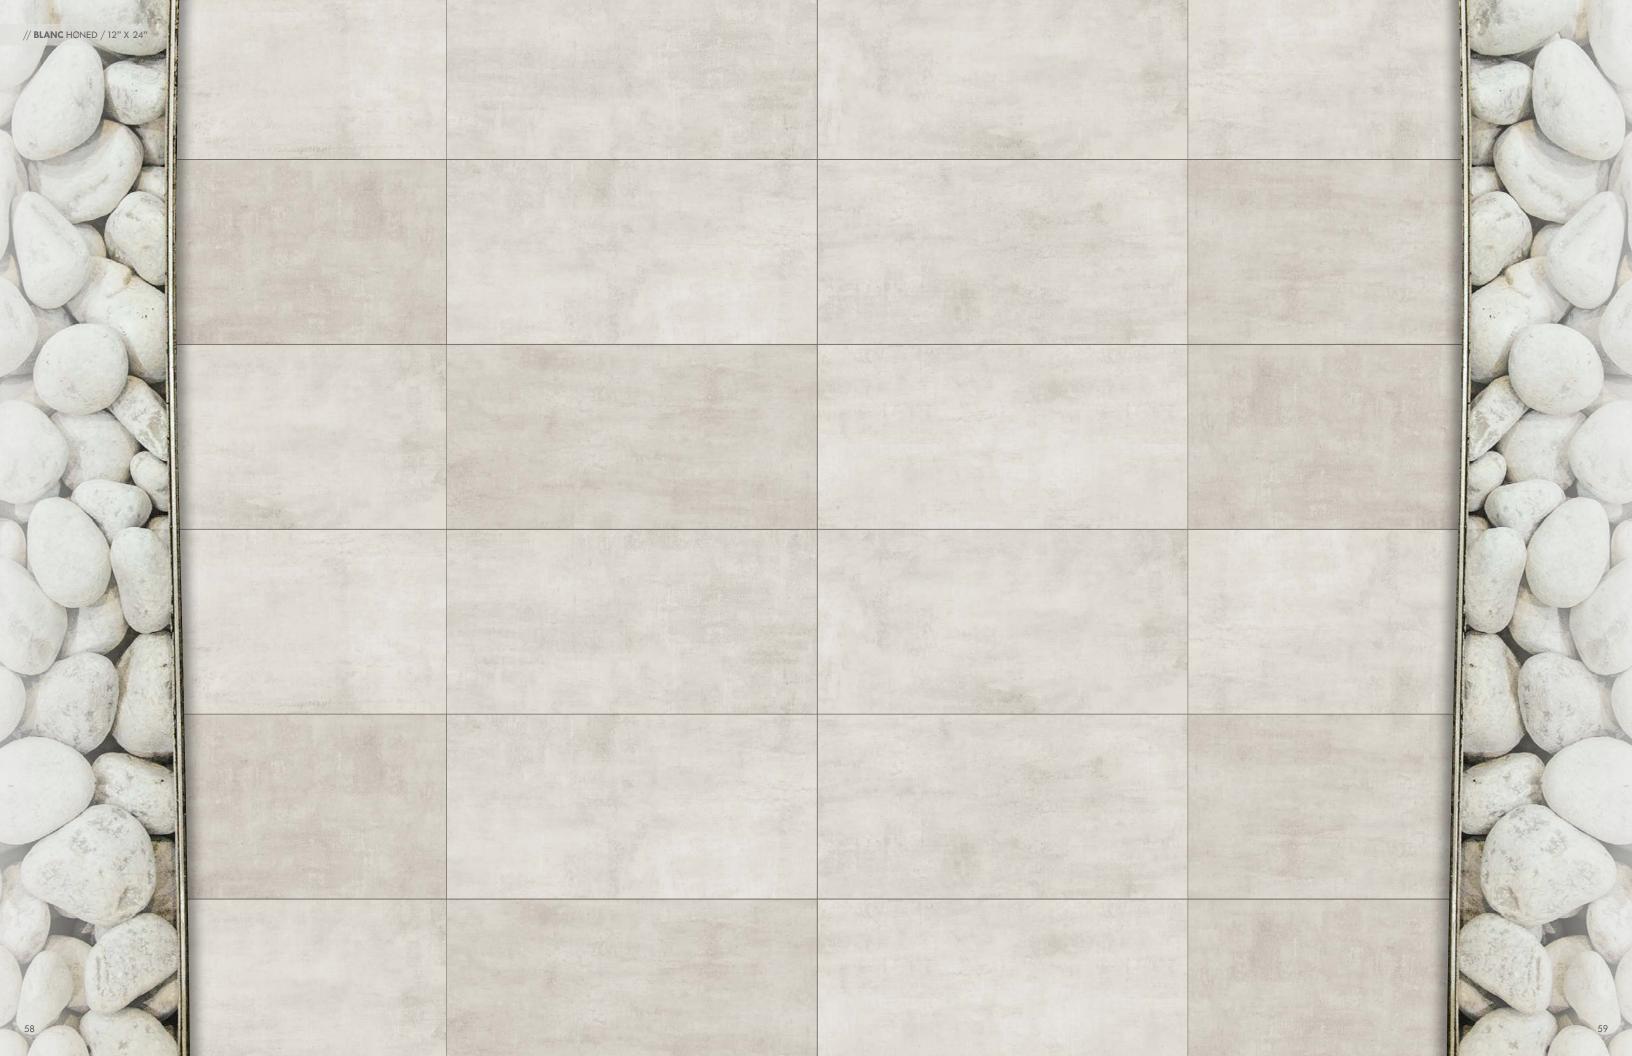



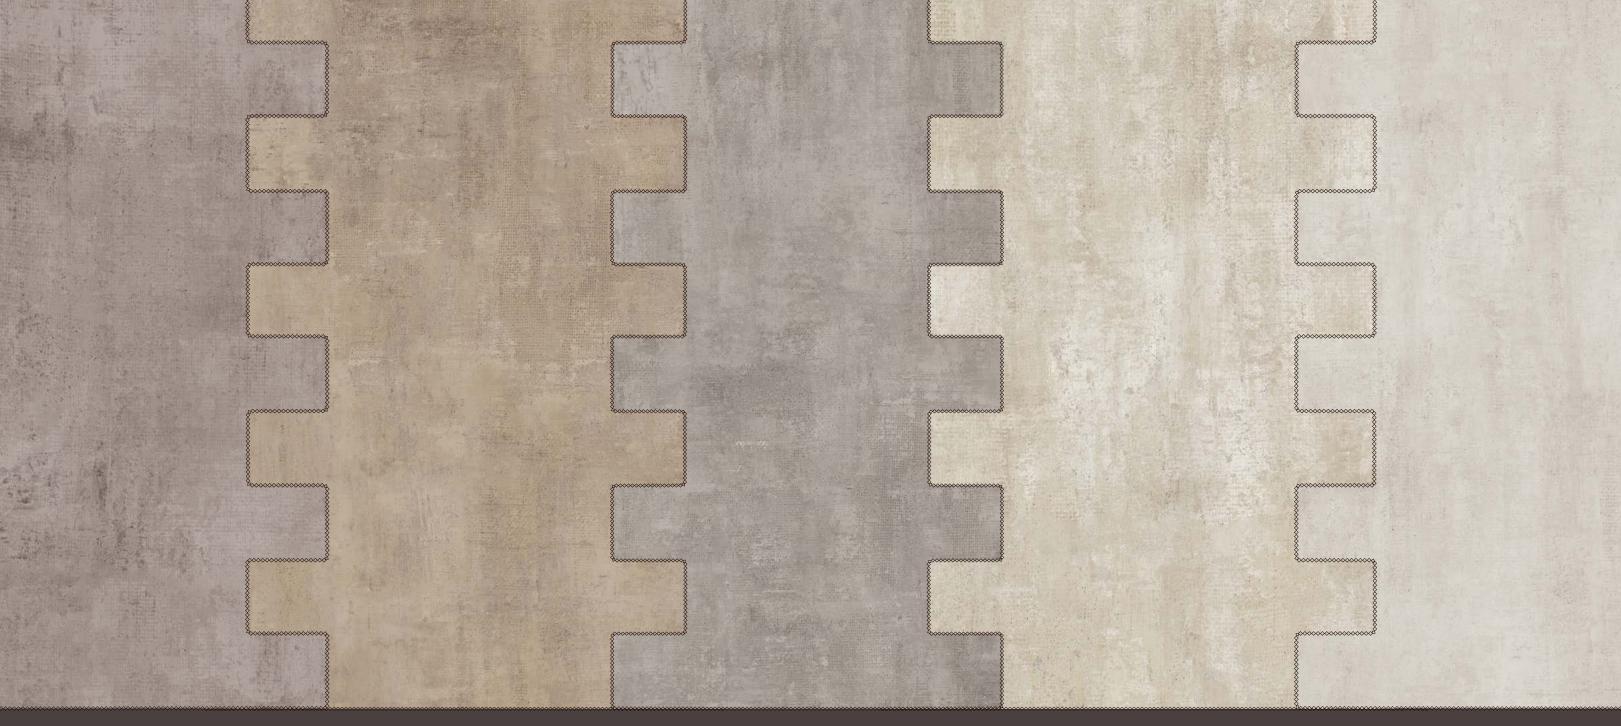

TORTORE HONED 18" x 36" Discontinued 12" x 24" Discontinued TORTORE LAPPATO 18" x 36" Discontinued 12" x 24" Discontinued

**DELIGHT** HONED 18" x 36" Discontinued 12" x 24" Discontinued DELIGHT LAPPATO 18" x 36" Discontinued 12" x 24" Discontinued FOG HONED 18" x 36" IRG1836159 12" x 24" IRG1224159 FOG LAPPATO 18" x 36" Discontinued 12" x 24" IRSP1224159

**ASH** HONED 18" x 36" IRG1836156 12" x 24" IRG1224156

TORTORE HONED



TORTORE HONED DELIGHT HONED



DELIGHT HONED



FOG HONED MOSAIC 2" X 2"



FOG HONED MOSAIC 1" X 2"





ASH HONED MOSAIC 2" X 2"



ASH LAPPATO 18" x 36" Discontinued 12" x 24" IRSP1224156 **BLANC** HONED 18" x 36" IRG1836157 12" x 24" IRG1224157

**BLANC** LAPPATO \*18" x 36" IRSP1836157 12" x 24" IRSP1224157

Available to produce in Lappato finish for orders of 4,000 sf or more

ASH HONED MOSAIC 1" X 2"

54 53 11			
1.14			
	1000		
		38.17	1. Sec.
	25 1 2		
3113			5.11
2-12-11	3.20		
		128 1	
11 28 11		100	
	11 28.1		1.90
11 38.11	1923		
	11 28.1		5.11

**BLANC** HONED



BLANC HONED MOSAIC 1" X 2"



### TECHNICAL INFORMATION

TRIMS	<b>BULLNOSE</b> 4" x 24"
TORTORE Honed	IRG424BT160
DELIGHT Honed	IRG424BT158
FOG Honed	IRG424BT159
ASH Honed	IRG424BT156
BLANC Honed	IRG424BT157

	<b>COVE BASE</b> 6" x 12"
TORTORE Honed	IRG612C160
DELIGHT Honed	IRG612C158
FOG Honed	IRG612C159
ASH Honed	IRG612C156

### **TREENGUARD**

Iris U.S. Products are GREENGUARD Certified The GREENGUARD Certification Program<sup>™</sup> is internationally recognized for evaluating product emissions and certifying building materials, furnishings, finishes and cleaning products and processes that meet stringent indoor air quality criteria defined by GREENGUARD Environmental Institute (GEI). Products undergo rigorous, third-party testing to determine their impact on indoor air pollution with requirements for ongoing verification. The GREENGUARD Environmental Institute recently announced that all flooring products certified to the stringent GREENGUARD Children & Schools<sup>™</sup> standard can earn valuable LEED<sup>™</sup> credits across multiple building rating systems. Iris U.S. has more than 70 flooring products certified that can help earn up to four (4) points under the low-emitting material credit (EQ 4.3).

PHYSICAL PROPERTIES	TEST
Water Absorbtion	ASTM C373
Calibrated (non rectified)	ASTM C499
	ASTM C499
	ASTM C485
	ASTM C485
	ASTM C502
Rectified	ASTM C499
	ASTM C499
	ASTM C485
	ASTM C485
	ASTM C502
Bond Strength	ASTM C482
Deep Abrasion	ASTM C1243
Visible Abrasion Resistance	ASTMC1027
Hardness (Mohs)	Scratch Test (No regulated)
Frost Resistance (Freeze/Thaw)	ASTM C1026
Chemical Resistance	ASTM C650
Stain Resistance	ASTMC1378
Breaking Strength	ASTM C648
Coefficient of Friction (Dynamic)	DCOF Acutest <sup>sm</sup> (wet)

\* All values given are for matte or honed material. No values are given for polished material. Iris U.S. does not recommend polished surfaces in area subject to exposure from grease, oil or water.

For level interior spaces to be walked upon when wet (see ANSI A137.1 section 6.2.2.1.10 - Section 9.6 for test procedure). Data taken from a representative colored body collection. Individual product testing can be conducted by request.

### **Runway** Packaging

**BLANC** Honed

PRODUCT	SIZE (inches)	BOX/PIECES	BOX/SF	PALLET/BOXES	PALLET/SF	THICKNESS (mm)	WEIGHT LB/SF
Floor & Wall Tile	18 x 36		22.189	18	399.402	8	3.63
	12 x 24		15.751	32	504.032		3.55
							LB/PIECE
2 x 2 Mosaic	12 x 12		4.896			8	3.55
1 x 2 Mosaic	12 x 12		4.896			8	3.55
Bullnose	4 x 24	16	10.388			8	2.00
Cove Base	6 x 12		3.876			7.5	1.70

IRG612C157

### **COLOR SHADE VARIATIONS**

As in nature, our products vary piece to piece. Please refer to the graph for variations.



V2		١

pieces from the same

variation within the same color

### INDUSTRY STANDARDS

Impervious < 0.5%

- Range of Thickness (inch)
- Average Facial Dimension
- Warpage
- Wedging
- Range of Thickness (inch)
- Average Facial Dimension
- Warpage
- Wedging
- ≥ 50 psi
- < 175 mm<sup>3</sup>
- No requirement, Range 0-5No requirement, Range 0 - 10
- No sample must show alterations to surface
- No requirement, Range E ANo requirement, Range E – A 250 lbf or greater
- ≥ 0.42\*

0.040 ± 0.50%  $\pm$  0.40% on any edge  $\pm$  0.40% on diagonal ± 0.50% ± 0.25%  $\pm$  0.40% on any edge

### **IRIS US RESULTS**

#### ≤ 0.1%

≤ 0.040 ≤ ± 0.50%  $\leq \pm 0.40\%$ ≤ ± 0.40% ≤ ± 0.50% ≤ 0.040 ≤ 0.25% ≤ 0.40% ≤ 0.40% ≤ 0.25% ≥ 200 psi < 150 mm<sup>3</sup> Class 4 No evidence of damage Class A\* ≥ 400 lbf

≥ 0.48\*



Extreme shade variation, piece to piece, within the same color



